



AQUA OVAL R40




ΠΕΡΙΕΧΟΜΕΝΑ / CONTENTS

datasheet	1
manual	2

ΚΩΔΙΚΟΣ / CODE

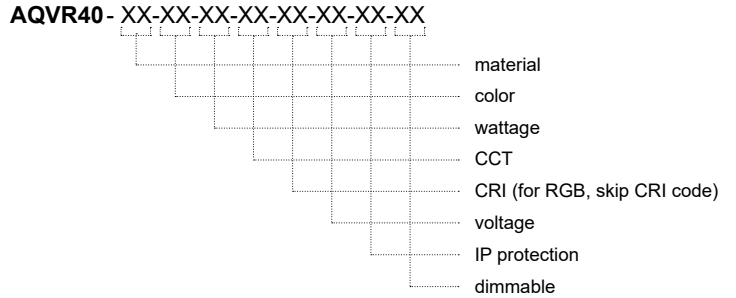

AQUA OVAL R40 (AQVR40) / Datasheet

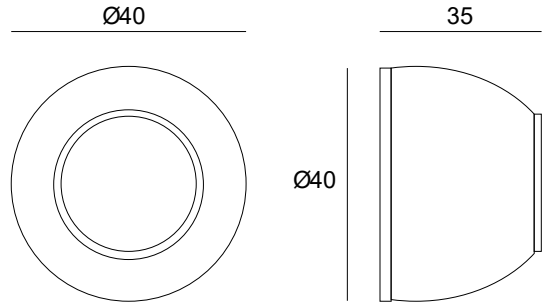

General information

Application	Indoor – Outdoor
Direction of mounting	Wall
LED	Cree / Osram
Life time	50000 hrs
Visible dimensions (Ø×L)	280gr
Weight	Ø40 × 35 mm
Warranty	3–5 years (*5 years upon request)
Origin	Greece

Material	Color	Wattage	CCT	CRI	Voltage	IP	Dimmable
Aluminium (01)	Anodised (AN)	0.5W (05W)	2700K (27K)	Ra80 (80)	12VDC (V1)	IP20 (20)	Yes (D)
Inox (02)	Black (BL)	1W (1W)	3000K (30K)	Ra90 (90)	24VDC (V2)	IP54 (54)	No (L)
Brass (03)	RAL colors (RL)	2W (2W)	4000K (40K)		230VAC (V3)	IP65 (65)	
		2.5W (25W)	5000K (50K)		12/24V (V4)		
		3W (3W)	6000K (60K)		350mA (V5)		
			(R)/(G)/(B)/(A)		500mA (V6)		
			RGB (C1)		700mA (V7)		

Δημιουργία Κωδικού προϊόντος / Product Code generator


AQVR40 - material - color - wattage - CCT - CRI - voltage - IP - dimmable

(ex. AQVR40-01-AN-1W-27K-80-V1-54-D for Aqua Oval R40 Aluminium Anodised 1W 2700K Ra80 12VDC IP54 Dimmable)


AQUA OVAL R40 / Manual

1. ΠΡΟΕΤΟΙΜΑΣΙΑ ΓΙΑ ΕΦΑΡΜΟΓΗ ΣΤΟΝ ΤΟΙΧΟ / PREPARATION FOR WALL APPLICATION
2. ΚΑΝΕΤΕ ΤΗΝ ΗΛΕΚΤΡΙΚΗ ΣΥΝΔΕΣΗ / MAKE THE ELECTRICAL CONNECTION
3. ΤΟΠΟΘΕΤΗΣΗ ΤΟΥ ΦΩΤΙΣΤΙΚΟΥ / PLACE THE LUMINARY

1.

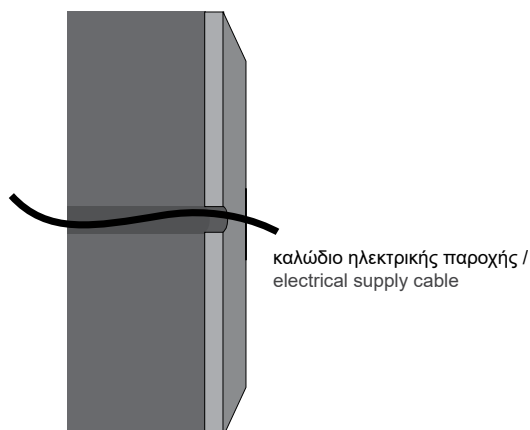

2.

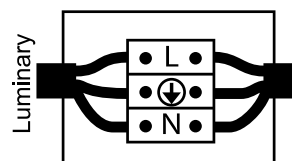

Συνδέστε το καλώδιο του φωτιστικού με την ηλεκτρική παροχή. Η σύνδεση πρέπει να είναι στεγανή. / Connect the cable of the luminaire with the electrical supply. The connection must be sealed.

3. Εφαρμογή στον τοίχο / Application on the wall

Εφαρμόστε το φωτιστικό στην επιφάνεια και βιδώστε το μέχρι να σταθεροποιηθεί στον τοίχο. / Apply the lamp to the surface and tighten the screws in until it is firmly stabilized on the wall.

