

GROUND 12 R100




ΠΕΡΙΕΧΟΜΕΝΑ / CONTENTS

datasheet	1
manual	2



ΚΩΔΙΚΟΣ / CODE

G12R100-XX-XX-XX-XX-XX-XX-XX-XX

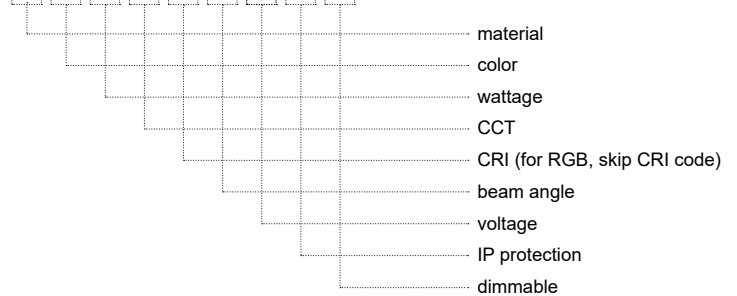

GROUND 12 R100 (G12R100) / Datasheet

To κουτί τοποθέτησης περιλαμβάνεται / Installation box is included



49.2 Ø56 × 49.2mm

General information

Application	Outdoor / Recessed
Direction of mounting	Ceiling / Wall / Ground
Installation	Box
LED	Cree / Osram
Life time	50000 hrs
Warranty	3-5 years (*5 years upon request)
Origin	Greece
Visible dimensions (Ø×L)	Ø100 × 49.2 mm

Material	Color	Wattage	CCT	CRI	Beam angle	Voltage	IP	Dimmable
Aluminium (01)	Anodised (AN)	1W (1W)	2700K (27K)	Ra80 (80)	Diffuse (DF)	12VDC (V1)	IP20 (20)	Yes (D)
Inox (02)	Black (BL)	1.5W (15W)	3000K (30K)	Ra90 (90)	8° (8D)	24VDC (V2)	IP54 (54)	No (L)
Brass (03)	White (WH)	2W (2W)	4000K (40K)		15° (15D)	230VAC (V3)	IP65 (65)	
	RAL colors (RL)	2.5W (25W)	5000K (50K)		20° (20D)	12/24V (V4)	IP67 (67)	
		3W (3W)	6000K (60K)		25° (25D)	350mA (V5)	IP68 (68)	
		4W (4W)	(R)/(G)/(B)/(A)		36° (36D)	500mA (V6)		
		5W (5W)	RGB (C1)		45° (45D)	700mA (V7)		
		6W (6W)	RGBW (5W 24V) (C2)		60° (60D)			
		7W (7W)			80° (80D)			


Δημιουργία Κωδικού προϊόντος / Product Code generator

G12R100 - material - color - wattage - CCT - CRI - beam angle - voltage - IP - dimmable


(ex. G12R100-01-AN-1W-27K-80-8D-V1-54-D for Ground 12 R100 Aluminium Anodised 1W 2700K Ra80 8° 12VDC IP54 Dimmable)

GROUND 12 R100 / Manual

1. ΠΡΟΕΤΟΙΜΑΣΙΑ ΤΟΥ ΕΔΑΦΟΥΣ / PREPARATION OF TERRAIN
2. ΚΑΝΕΤΕ ΤΗΝ ΗΛΕΚΤΡΙΚΗ ΣΥΝΔΕΣΗ / MAKE THE ELECTRICAL CONNECTION
3. ΤΟΠΟΘΕΤΗΣΗ ΤΟΥ ΦΩΤΙΣΤΙΚΟΥ / PLACE THE LUMINAIRE


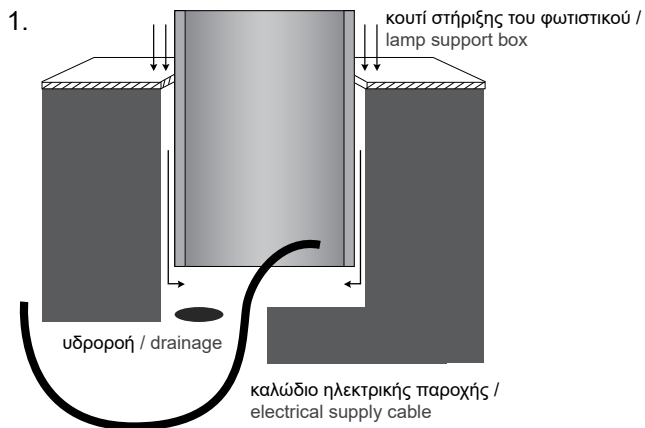


2.



Συνδέστε το καλώδιο του φωτιστικού με την ηλεκτρική παροχή. Η σύνδεση πρέπει να είναι στεγανή. / Connect the cable of the luminaire with the electrical supply. The connection must be sealed.

- 3 Εφαρμογή στο έδαφος με O-ring / Application on ground using O ring

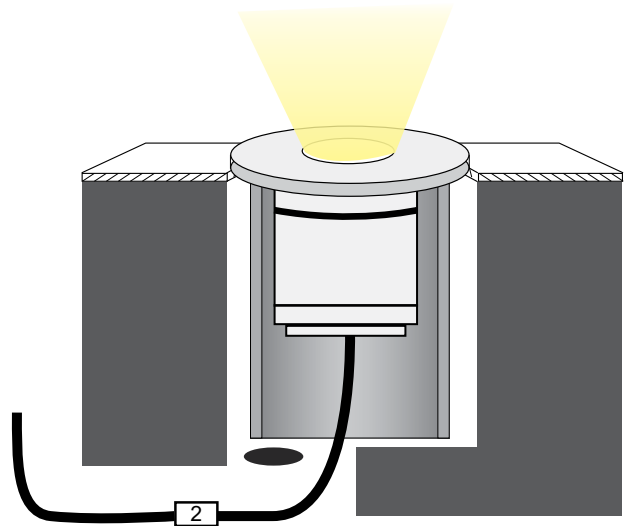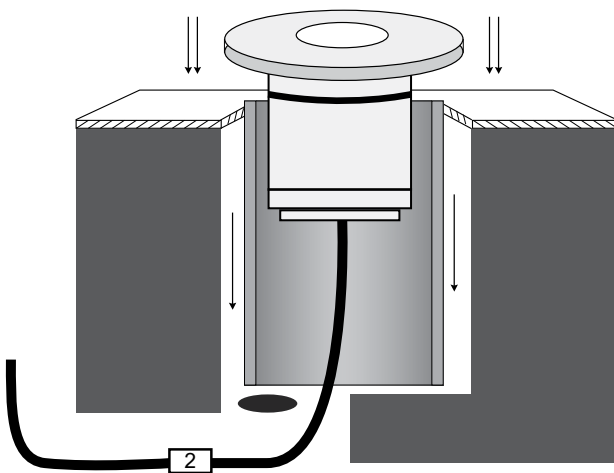

Εφαρμόστε το φωτιστικό στο κουτί εγκατάστασης μέχρι να σφινώσει και να σταθεροποιηθεί. / Apply the luminaire to the installation box until it is firm and stabilized.