


# FLEX 1




## ΠΕΡΙΕΧΟΜΕΝΑ / CONTENTS

datasheet	1
manual	2

## ΚΩΔΙΚΟΣ / CODE

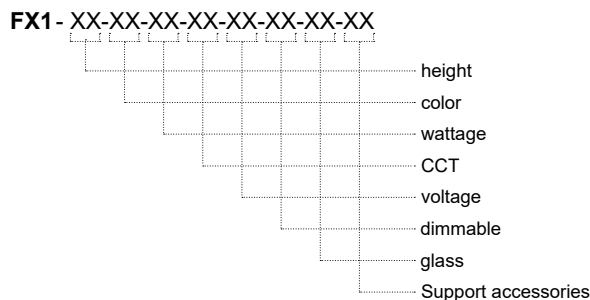

## FLEX 1 (FX1) / Datasheet

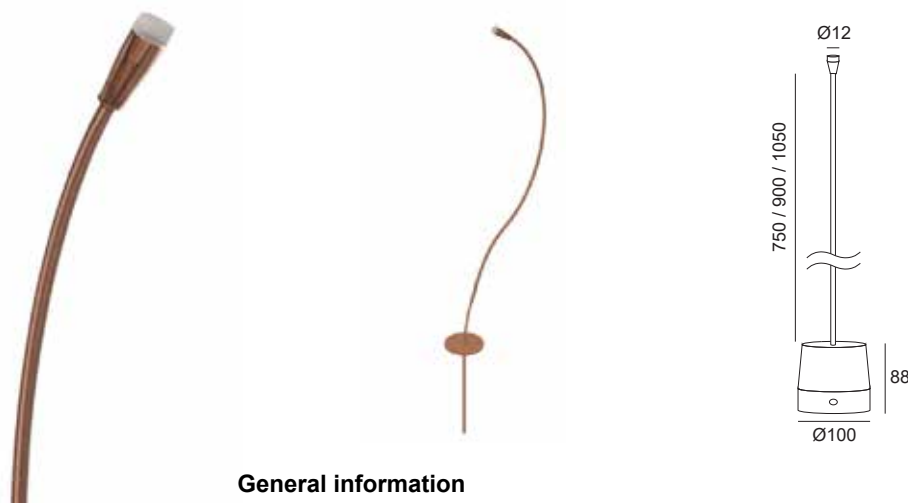

### General information

Application	Outdoor / Indoor
Direction of mounting	Floor
Material	Copper
IP Classification	IP65
LED	Cree / Osram
Beam angle	120° (360° with glass)
CRI	Ra80
Life time	50000 hrs
Warranty	3–5 years (*5 years upon request)
Origin	Greece



Height	Color	Wattage	CCT	Voltage	Dimmable	Glass	Support accessories
H750mm (H75)	Black (BL)	0.5W (05W)	2700K (27K)	12VDC (V1)	Yes (D)	Glass 1 (G1)	Post D10x600mm Bronze with base (PL5)
H900mm (H90)	White (WH)	1W (1W)	3000K (30K)	24VDC (V2)	No (L)	Glass 2 (G2)	Base D100xH88 (B2)
H1050mm (H105)	RAL colors (RL)	2W (2W)	4000K (40K)	230VAC (V3)		Glass 3 (G3)	
	No color (L)		5000K (50K)			Glass 4 (G4)	
			6000K (60K)			Glass 5 (G5)	
			(R)/(G)/(B)/(A)			No Glass (L)	


Δημιουργία Κωδικού προϊόντος / Product Code generator

**FX1 - height - color - wattage - CCT - voltage - dimmable - glass - support accessories**  
 (ex. FX1-H75-BL-1W-27K-V1-D-G1-B2 for Flex 1, H750mm, Black, 1W, 2700K, 12VDC, Dimmable, Glass 1, Base D100xH88)


## FLEX 1 / Manual

1. ΠΡΟΕΤΟΙΜΑΣΙΑ ΤΟΥ ΕΔΑΦΟΥΣ / PREPARATION OF TERRAIN
2. ΒΙΔΩΝΕΤΕ ΤΗΝ ΒΑΣΗ ΣΤΟ ΕΔΑΦΟΣ ΚΑΙ 3. ΠΕΡΝΑΤΕ ΤΟ ΚΑΛΩΔΙΟ ΗΛΕΚΤΡΙΚΗΣ ΠΑΡΟΧΗΣ ΜΕΣΑ ΑΠΟ ΤΗ ΒΑΣΗ / APPLY THE BASE TO THE GROUND AND 3. PASS THE ELECTRICAL CABLE THROUGH.
4. ΚΑΝΕΤΕ ΤΗΝ ΗΛΕΚΤΡΙΚΗ ΣΥΝΔΕΣΗ / MAKE THE ELECTRICAL CONNECTION
5. ΤΟΠΟΘΕΤΗΣΗ ΤΟΥ ΦΩΤΙΣΤΙΚΟΥ / PLACE THE LUMINAIRE (επιδαπέδια/ground)

1.

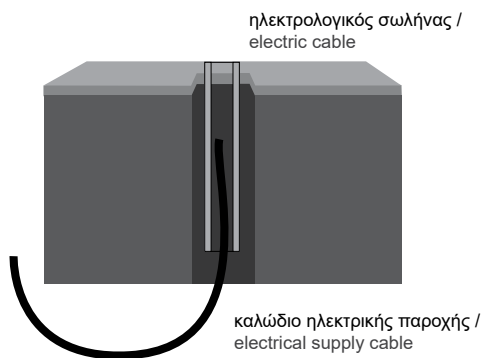


2.

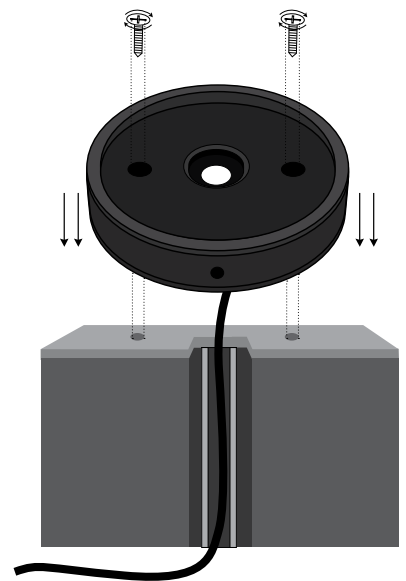


Βιδώνετε τη βάση με βίδες στο έδαφος . /  
Apply the base with screws on the ground.

3.

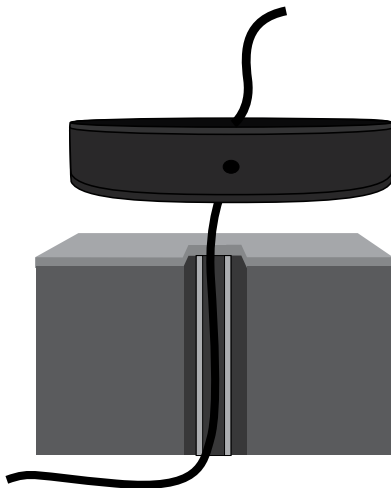



4.




Συνδέστε το καλώδιο του φωτιστικού με την ηλεκτρική παροχή.  
Η σύνδεση πρέπει να είναι στεγανή. /  
Connect the cable of the luminaire with the electrical supply.  
The connection must be sealed.

## FLEX 1 / Manual

5.

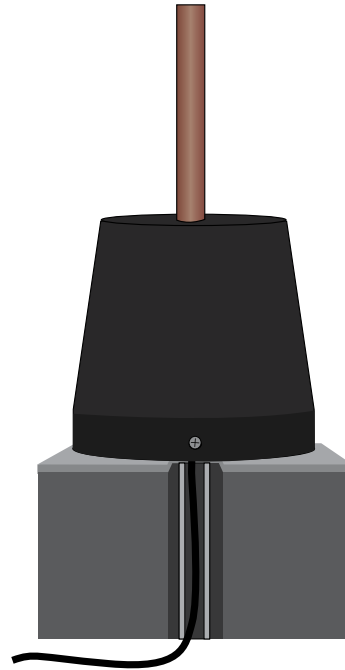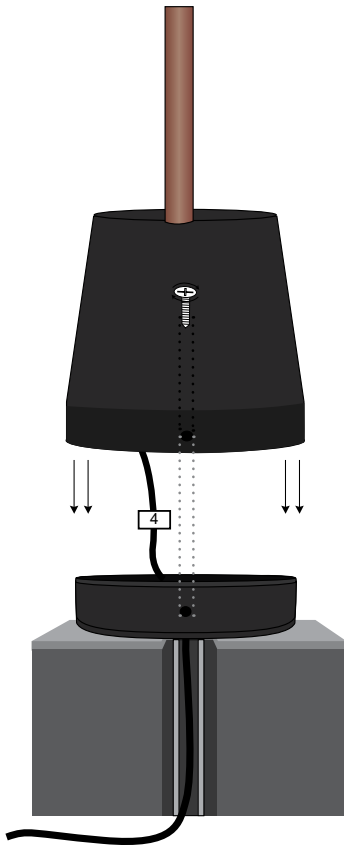

Βιδώνετε το φωτιστικό στην βάση απο τις πλαϊνές οπές μέχρι να σταθεροποιηθεί. / Apply the luminaire to the base from the side holew until it stabilizes.

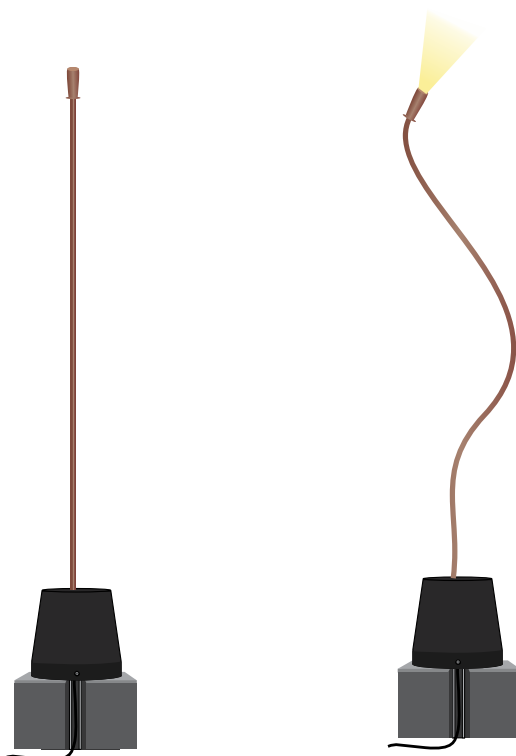

Μπορείτε να αναπροσαρμόσετε τους σωλήνες του φωτιστικού ανεξάρτητα και να δημιουργήσετε το design που ταιριάζει καλύτερα στο χώρο σας. / You can re-adjust the luminaires independently and create the design that best suits your space.