



WALL 12 O'CLOCK

*5 yrs upon request

ΠΕΡΙΕΧΟΜΕΝΑ / CONTENT


datasheet	1
manual	2

ΚΩΔΙΚΟΣ / CODE


12CLC- XXX XX XX XXX XX XX XX X

- height
- rosette placement
- color
- CCT
- CRI (for RGB, skip CRI code)
- voltage
- IP
- dimmable

WALL 12 O'CLOCK (12CLC-) / Datasheet

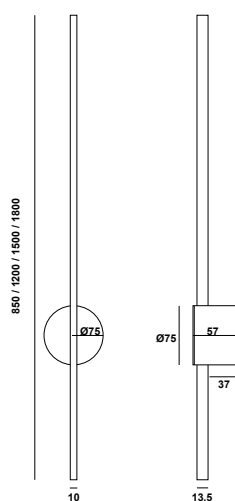

general information

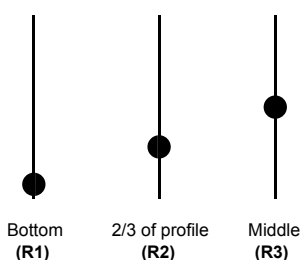

application	Indoor / Wall Mounted
material	Aluminium
life time	50.000 hrs
warranty	3-5 years (*5 yrs upon request)
origin	Made in Greece

height	wattage	rosette placement	color	CCT	CRI	Voltage	IP	Dimmable
850mm (085)	6W	In the middle (R1)	Black (BL)	2700K (27K)	Ra80 (80)	12VDC (V1)	IP20 (20)	Yes (D)
1200mm (120)	11W	2/3 of profile (R2)	White (WH)	3000K (30K)	Ra90 (90)	24VDC (V2)	IP44 (44)	Please get the corresponding Controllers / Dimmers from our wide range of products.
1500mm (150)	14W	Bottom (R3)	Anodised (AN)	4000K (40K)	Ra95 (95)	230VAC (V3)	IP54 (54)	
1800mm (180)	16W	Other (R)	RAL colors (RL)	5000K (50K)				
			Nickel plating (NK)	6000K (60K)				
			No color (L)	(R) / (G) / (B) / (AM)				

Δημιουργία Κωδικού προϊόντος / Product Code generator




12CLC - height - rosette placement - color - CCT - CRI - IP - dimmable)

(ex. 12CLC-085-R3-BL-30K-80-V3-20-D for WALL12 O'CLOCK Bottom Rosette 850mm 6W Black 3000K Ra80 230VAC IP20 dimmable)


WALL 12 O'CLOCK / Manual



*5 yrs upon request

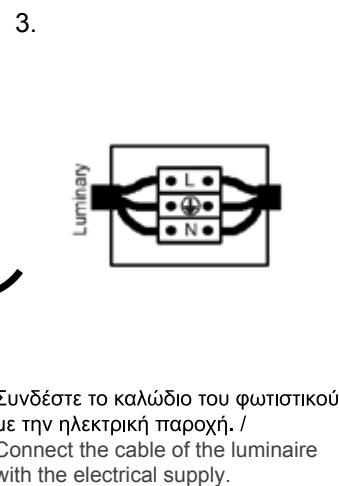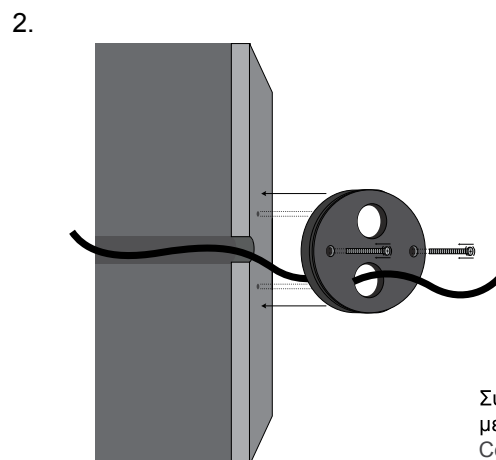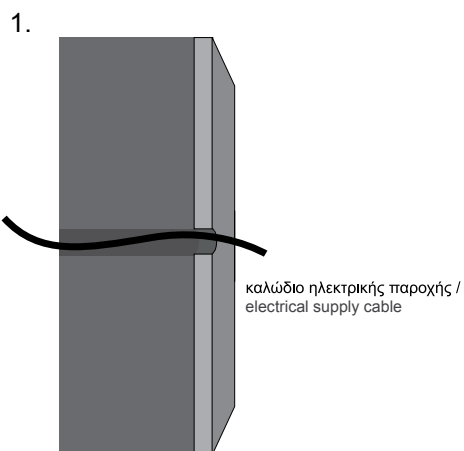

4. Εφαρμογή στον τοίχο /
Application on the wall

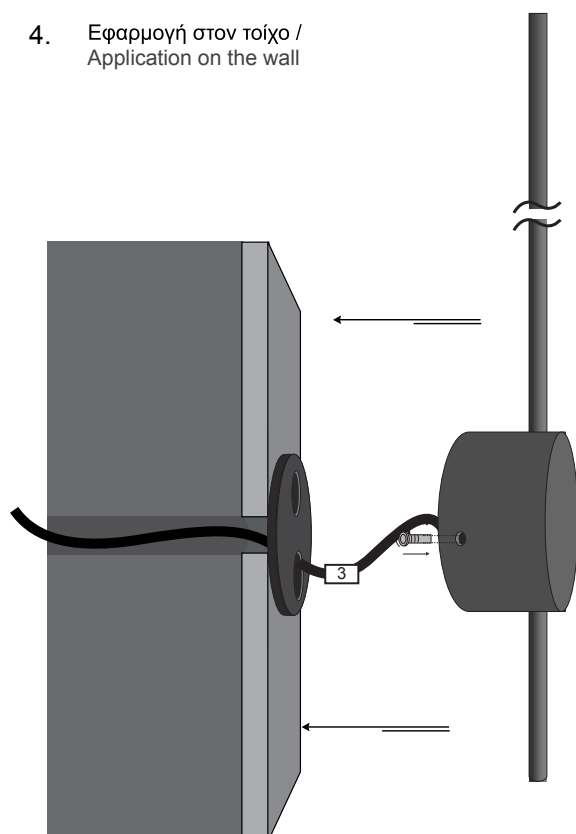

Εφαρμόστε το φωτιστικό στην τοποθετημένη
βάση και βιδώστε το πάνω της με δεξιόστροφη
περιστροφή μέχρι να σταθεροποιηθεί. /
Apply the lamp to the mounted base and
tighten it with a clockwise rotation until it
is firmly stabilized on the base.

