


STEP 3 BEAM R100



ΠΕΡΙΕΧΟΜΕΝΑ / CONTENTS

Datasheet	1
Manual	2

SKU: **ST3B100**-XX-XX-XX-XX-XX-XX-XX

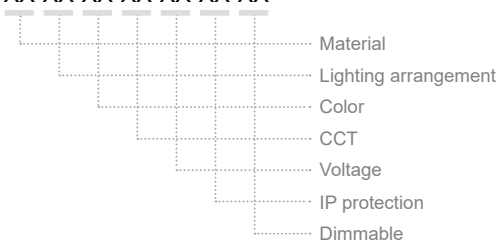

STEP 3 BEAM R100 (ST3B100) / Datasheet



GENERAL INFORMATION

APPLICATION	Indoor / Outdoor
DIRECTION OF MOUNTING	Ground
LED	Cree / Osram
WATTAGE	1.3 W
CRI	Ra80
BEAM ANGLE	15D
LIFE TIME	50000 hours
WARRANTY	3-5 years (*5 years upon request)
ORIGIN	Greece
VISIBLE DIMENSIONS (Ø×L)	Ø100 × 22 mm

Material	Lighting arrangement	Color	CCT	Voltage	IP	Dimmable
Aluminium (01)	Type T (T)	Anodised (AN)	3000K (30K)	12VDC (V1)	IP20 (20)	Dim (D)
Inox (02)	Type Y (Y)	Black (BL)	4000K (40K)	24VDC (V2)	IP65 (65)	No Dim (L)
Brass (03)		White (WH)	5000K (50K)		IP67 (67)	
PVC (04)		RAL colors (RL)	6000K (60K)			
		Patina (PT)	(R) / (G) / (B) / (A)			


Δημιουργία Κωδικού προϊόντος / Product Code generator

ST3B100 - material - lighting arrangement - color - CCT - voltage - IP - dimmable
 (ex. ST3B100-01-T-AN-27K-V1-65-D for Step 3 Beam R100 Aluminium Type T Anodised 2700K 12VDC IP65 Dimmable)


STEP 3 BEAM R100 / Manual

1. ΠΡΟΕΤΟΙΜΑΣΙΑ ΤΟΥ ΕΔΑΦΟΥΣ / PREPARATION OF TERRAIN
2. ΚΑΝΕΤΕ ΤΗΝ ΗΛΕΚΤΡΙΚΗ ΣΥΝΔΕΣΗ / MAKE THE ELECTRICAL CONNECTION
3. ΤΟΠΟΘΕΤΗΣΗ ΤΟΥ ΦΩΤΙΣΤΙΚΟΥ / PLACE THE LUMINAIRE (επιδαπέδια/ground)

1.

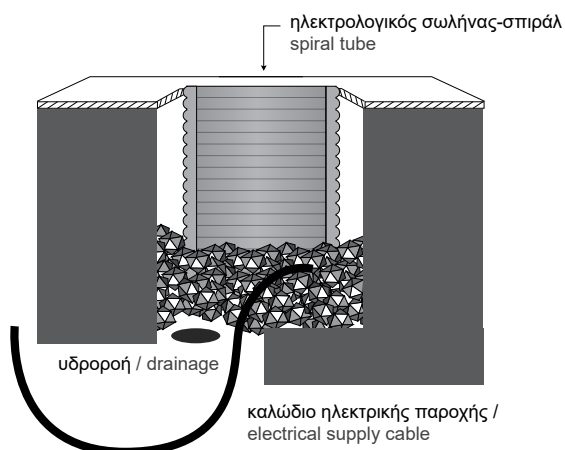


2.



Συνδέστε το καλώδιο του φωτιστικού με την ηλεκτρική παροχή. Η σύνδεση πρέπει να είναι στεγανή.
Connect the cable of the luminaire with the electrical supply. The connection must be sealed.

3. Εφαρμογή στο έδαφος με βίδωμα
Application on ground using screws

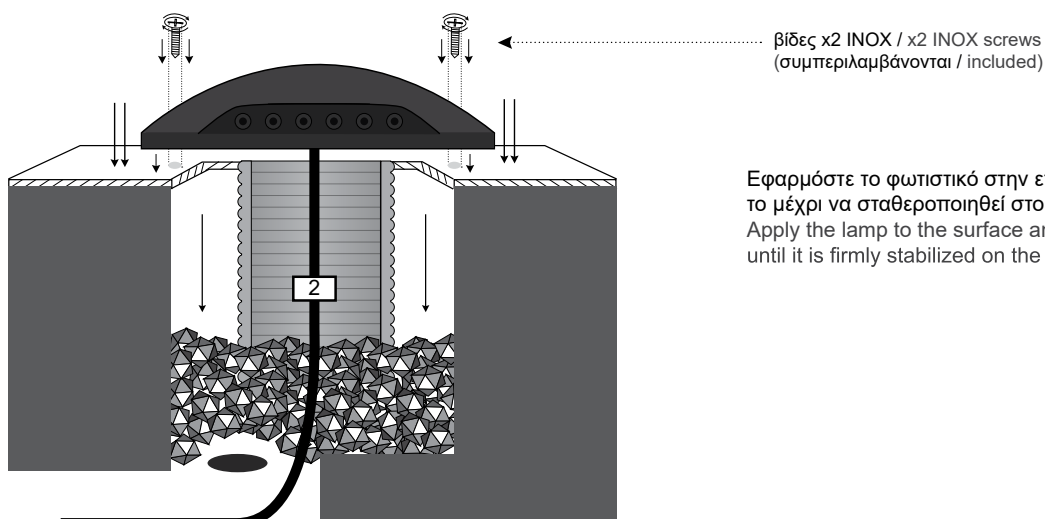

Εφαρμόστε το φωτιστικό στην επιφάνεια και βιδώστε το μέχρι να σταθεροποιηθεί στο έδαφος.
Apply the lamp to the surface and tighten the screws in until it is firmly stabilized on the ground.