

# STEP 3 BEAM R100




## ΠΕΡΙΕΧΟΜΕΝΑ / CONTENTS







datasheet	1
manual	2

## ΚΩΔΙΚΟΣ / CODE

ST3B100- XX-XX-XX-XX-XX-XX-XX

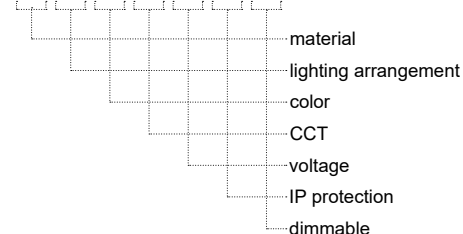

## STEP 3 BEAM R100 (ST3B100) / Datasheet



### General information

Application	Indoor / Outdoor
Direction of mounting	Ground
LED	Cree / Osram
Wattage	1.3 W
CRI	Ra80
Beam angle	15°
Life time	50000 hrs
Warranty	3-5 years (*5 years upon request)
Origin	Greece
Visible dimensions (Ø×L)	Ø100 × 22 mm

Material	Lighting arrangement	Color	CCT	Voltage	IP	Dimmable
Aluminium (01)	Type T (T)	Anodised (AN)	3000K (30K)	12VDC (V1)	IP65 (65)	Yes (D)
Inox (02)	Type Y (Y)	Black (BL)	4000K (40K)	24VDC (V2)	IP67 (65)	No (L)
Brass (03)		White (WH)	5000K (50K)	230VAC (V3)		
PVC (04)		RAL colors (RL)	6000K (60K)			
			(R)/(G)/(B)/(A)			


Δημιουργία Κωδικού προϊόντος / Product Code generator

ST3B100 - material - lighting arrangement - color - CCT - voltage - IP - dimmable  
 (ex. ST3B100-01-T-AN-27K-V1-65-D for Step 3 Beam R100 Aluminium Type T Anodised 2700K 12VDC IP65 Dimmable)


## STEP 3 BEAM R100 / Manual

1. ΠΡΟΕΤΟΙΜΑΣΙΑ ΤΟΥ ΕΔΑΦΟΥΣ / PREPARATION OF TERRAIN
2. ΚΑΝΕΤΕ ΤΗΝ ΗΛΕΚΤΡΙΚΗ ΣΥΝΔΕΣΗ / MAKE THE ELECTRICAL CONNECTION
3. ΤΟΠΟΘΕΤΗΣΗ ΤΟΥ ΦΩΤΙΣΤΙΚΟΥ / PLACE THE LUMINAIRE (επιδαπέδια/ground)

1.

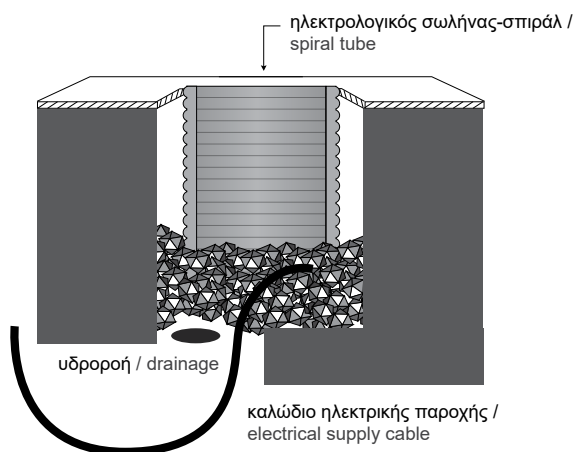


2.

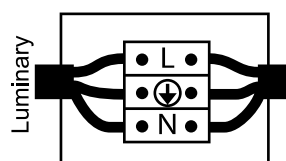

Συνδέστε το καλώδιο του φωτιστικού με την ηλεκτρική παροχή. Η σύνδεση πρέπει να είναι στεγανή. / Connect the cable of the luminaire with the electrical supply. The connection must be sealed.

3. Εφαρμογή στο έδαφος με βίδωμα / Application on ground using screws

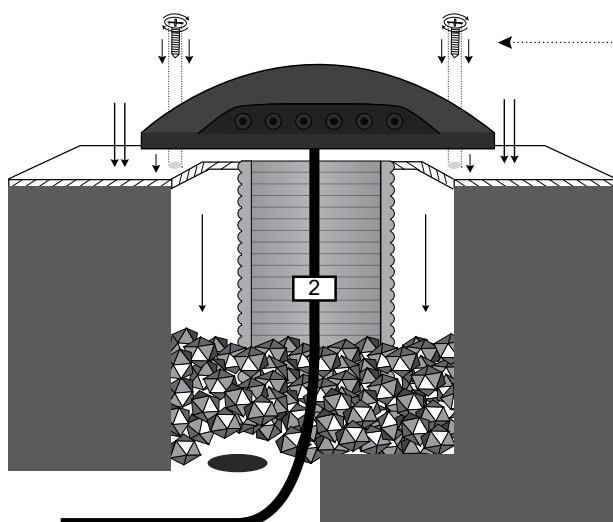

βίδες x2 INOX / x2 INOX screws  
(συμπεριλαμβάνονται / included)

Εφαρμόστε το φωτιστικό στην επιφάνεια και βιδώστε το μέχρι να σταθεροποιηθεί στο έδαφος. / Apply the lamp to the surface and tighten the screws in until it is firmly stabilized on the ground.