


# TUBE R60×80




## ΠΕΡΙΕΧΟΜΕΝΑ / CONTENTS

Datasheet	1
Manual	4

SKU: TUBER60- XX-XX-XX-XX-XX-XX-XX-XX-XX-XX-XX-XX

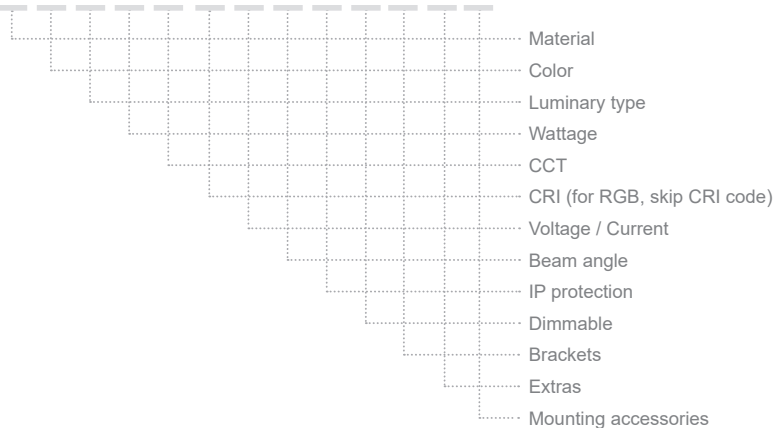

## TUBE R60×80 (TUBER60-) / Datasheet

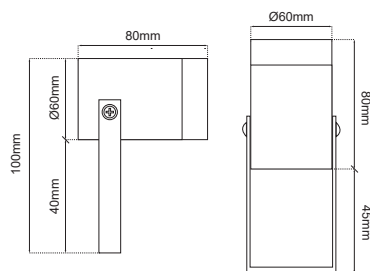

### GENERAL INFORMATION

APPLICATION	Outdoor / Surface mounted
DIRECTION OF MOUNTING	Ceiling / Wall / Ground
INCL. CABLE	Yes
LED TYPE	XTE/XRE/XPE/NICHIA/GU10
LIFE TIME	50000 hours
WARRANTY	3–5 years (*5 years upon request)
ORIGIN	Greece
VISIBLE DIMENSIONS (Ø×L)	Ø60 × 80 mm

# TUBE R60×80 / Datasheet

SKU: TUBER60- XX-XX-XX-XX-XX-XX-XX-XX-XX-XX-XX-XX-XX-XX

MATERIAL  
COLOR  
LUMINARY TYPE  
WATTAGE  
CCT  
CRI (skip for RGB)  
VOLTAGE  
BEAM ANGLE  
IP PROTECTION  
DIMMABLE  
BRACKETS  
EXTRAS  
MOUNTING ACCESSORIES

Material*	Color*	Luminary type*	WATTAGE*		
Aluminium (01)	Anodised (AN)	GU10 (230VAC) (GU1) *	3W (3W)	6W (6W)	9W (9W)
Inox (02)	Black (BL)	GU5.3 (12AC/DC) (GU5) *	4W (4W)	7W (7W)	10W (10W)
Brass (03)	White (WH)	LED (1L)	5W (5W)	8W (8W)	15W (15W)
	Graphite (GF)				
	RAL colors (RL)				
	Patina (PT)				

\* Wattage, CCT, CRI, Voltage, Beam angle and Dimmable options are not available for GU10 and GU5.3

Please find the remaining options below, in the section that corresponds on your selection of wattage.












W	CCT*						CRI*		Voltage*						Beam angle*										
3W	2700K (27K)	3000K (30K)	4000K (40K)	5000K (50K)	6000K (60K)	(R) / (G) / (B) / (A)	RGB (C1)	Ra80 (80)	Ra90 (90)	12VDC (V1)	24VDC (V2)		12/24V (V4)	350mA (V5)	500mA (V6)	Diffuse (DF)	3D (3D)	8D (8D)	15D (15D)	20D (20D)	35D (35D)	45D (45D)	60D (60D)	80D (80D)	
	2700K (27K)	3000K (30K)	4000K (40K)	5000K (50K)	6000K (60K)	(R) / (G) / (B) / (A)		Ra80 (80)	Ra90 (90)				230VAC (V3)			Diffuse (DF)				20D (20D)		45D (45D)			
4W	2700K (27K)	3000K (30K)	4000K (40K)	5000K (50K)	6000K (60K)	(R) / (G) / (B) / (A)		Ra80 (80)	Ra90 (90)	12VDC (V1)	24VDC (V2)		12/24V (V4)	350mA (V5)	500mA (V6)	Diffuse (DF)		8D (8D)	15D (15D)	20D (20D)	35D (35D)	45D (45D)	60D (60D)	80D (80D)	
	2700K (27K)	3000K (30K)	4000K (40K)	5000K (50K)	6000K (60K)	(R) / (G) / (B) / (A)		Ra80 (80)	Ra90 (90)				230VAC (V3)			Diffuse (DF)				20D (20D)		45D (45D)			
5W	2700K (27K)	3000K (30K)	4000K (40K)	5000K (50K)	6000K (60K)	(R) / (G) / (B) / (A)		Ra80 (80)	Ra90 (90)	12VDC (V1)	24VDC (V2)		12/24V (V4)	350mA (V5)	500mA (V6)	Diffuse (DF)	3D (3D)	8D (8D)	15D (15D)	20D (20D)	35D (35D)	45D (45D)	60D (60D)	80D (80D)	
	2700K (27K)	3000K (30K)	4000K (40K)	5000K (50K)	6000K (60K)	(R) / (G) / (B) / (A)	RGB (C1)	Ra80 (80)	Ra90 (90)	12VDC (V1)	24VDC (V2)		12/24V (V4)	350mA (V5)	500mA (V6)	Diffuse (DF)		8D (8D)	15D (15D)	20D (20D)	35D (35D)	45D (45D)	60D (60D)	80D (80D)	
6W	2700K (27K)	3000K (30K)	4000K (40K)	5000K (50K)	6000K (60K)	(R) / (G) / (B) / (A)	RGB (C1)	Ra80 (80)	Ra90 (90)	12VDC (V1)	24VDC (V2)		12/24V (V4)	350mA (V5)	500mA (V6)	Diffuse (DF)		8D (8D)	15D (15D)	20D (20D)	35D (35D)	45D (45D)	60D (60D)	80D (80D)	
	2700K (27K)	3000K (30K)	4000K (40K)	5000K (50K)	6000K (60K)	(R) / (G) / (B) / (A)		Ra80 (80)	Ra90 (90)				230VAC (V3)			Diffuse (DF)				20D (20D)		45D (45D)			
7W	2700K (27K)	3000K (30K)	4000K (40K)	5000K (50K)	6000K (60K)	(R) / (G) / (B) / (A)	RGB (C1)	Ra80 (80)	Ra90 (90)	12VDC (V1)	24VDC (V2)		12/24V (V4)	350mA (V5)	500mA (V6)	Diffuse (DF)		8D (8D)	15D (15D)	20D (20D)	35D (35D)	45D (45D)	60D (60D)	80D (80D)	
	2700K (27K)	3000K (30K)	4000K (40K)	5000K (50K)	6000K (60K)	(R) / (G) / (B) / (A)		Ra80 (80)	Ra90 (90)				230VAC (V3)			Diffuse (DF)				20D (20D)		45D (45D)			
8W	2700K (27K)	3000K (30K)	4000K (40K)	5000K (50K)	6000K (60K)	(R) / (G) / (B) / (A)	RGBW (C2)	Ra80 (80)	Ra90 (90)		24VDC (V2)			350mA (V5)	500mA (V6)	Diffuse (DF)					35D (35D)				
	2700K (27K)	3000K (30K)	4000K (40K)	5000K (50K)	6000K (60K)	(R) / (G) / (B) / (A)		Ra80 (80)	Ra90 (90)				230VAC (V3)			Diffuse (DF)				20D (20D)		45D (45D)			
9W	2700K (27K)	3000K (30K)	4000K (40K)	5000K (50K)	6000K (60K)	(R) / (G) / (B) / (A)	RGBW (C2)	Ra80 (80)	Ra90 (90)	12VDC (V1)	24VDC (V2)		12/24V (V4)	350mA (V5)	500mA (V6)	Diffuse (DF)				20D (20D)		45D (45D)			
	2700K (27K)	3000K (30K)	4000K (40K)	5000K (50K)	6000K (60K)	(R) / (G) / (B) / (A)		Ra80 (80)	Ra90 (90)				230VAC (V3)			Diffuse (DF)				20D (20D)		45D (45D)			
10W	2700K (27K)	3000K (30K)	4000K (40K)	5000K (50K)	6000K (60K)	(R) / (G) / (B) / (A)	RGBW (C2)	Ra80 (80)	Ra90 (90)		24VDC (V2)			350mA (V5)	500mA (V6)	Diffuse (DF)					35D (35D)				
	2700K (27K)	3000K (30K)	4000K (40K)	5000K (50K)	6000K (60K)	(R) / (G) / (B) / (A)		Ra80 (80)	Ra90 (90)				230VAC (V3)			Diffuse (DF)				20D (20D)		45D (45D)			
15W	2700K (27K)	3000K (30K)	4000K (40K)	5000K (50K)	6000K (60K)			Ra80 (80)	Ra90 (90)				230VAC (V3)			Diffuse (DF)				20D (20D)		45D (45D)			

# TUBE R60×80 / Datasheet

SKU: TUBER60- XX-XX-XX-XX-XX-XX-XX-XX-XX-XX-XX-XX

MATERIAL  
 COLOR  
 LUMINARY TYPE  
 WATTAGE  
 CCT  
 CRI (skip for RGB)  
 VOLTAGE  
 BEAM ANGLE  
 IP PROTECTION  
 DIMMABLE  
 BRACKETS  
 EXTRAS  
 MOUNTING ACCESSORIES

## EXTRAS OPTIONS:

IP protection*	Dimmable*	Brackets*	Extras	Mounting accessories
IP65 (65)	Dim (D)	Bracket L (B1) 	Shadow (SH) 	Pole Φ10×200mm Brass (PL1) 
IP67 (67)	No Dim (L)	Bracket Π (B2) 	Honeycomb (HC) 	Pole Φ10×600mm Brass (PL2) 
		90D angle Bracket (B90) 		Pole Φ10×1000mm Brass (PL3) 
				Spike D32×150mm Aluminium (SP) 
				Hinged Rod with Base (HRB) 
				Base Bracket Π H106mm (BB4) 

Δημιουργία Κωδικού προϊόντος / Product Code generator

TUBER60- material - color - luminary type - wattage - CCT - CRI - voltage - beam angle - IP - dimmable - brackets - extras - mounting accessories

EXAMPLE:


TUBER60 - 01-BL-1L-3W-27K-90-V1-15D-65-D-SH-HC -PL1

for TUBE R60×80, aluminium, black, 3W, 2700K, Ra90, 12VDC, 15o, IP65, dimmable, Bracket L, shadow and honeycomb - Pole Φ10x200mm Brass)




## TUBE R60×80 / Manual

1. ΠΡΟΕΤΟΙΜΑΣΙΑ ΓΙΑ ΕΦΑΡΜΟΓΗ ΣΤΟΝ ΤΟΙΧΟ / PREPARATION FOR WALL APPLICATION
2. ΤΟΠΟΘΕΤΗΣΗ ΒΑΣΗΣ ΣΤΟΝ ΤΟΙΧΟ / APPLICATION OF BASE ON WALL
3. ΚΑΝΕΤΕ ΤΗΝ ΗΛΕΚΤΡΙΚΗ ΣΥΝΔΕΣΗ / MAKE THE ELECTRICAL CONNECTION
4. ΤΟΠΟΘΕΤΗΣΗ ΤΟΥ ΦΩΤΙΣΤΙΚΟΥ / PLACE THE LUMINAIRE

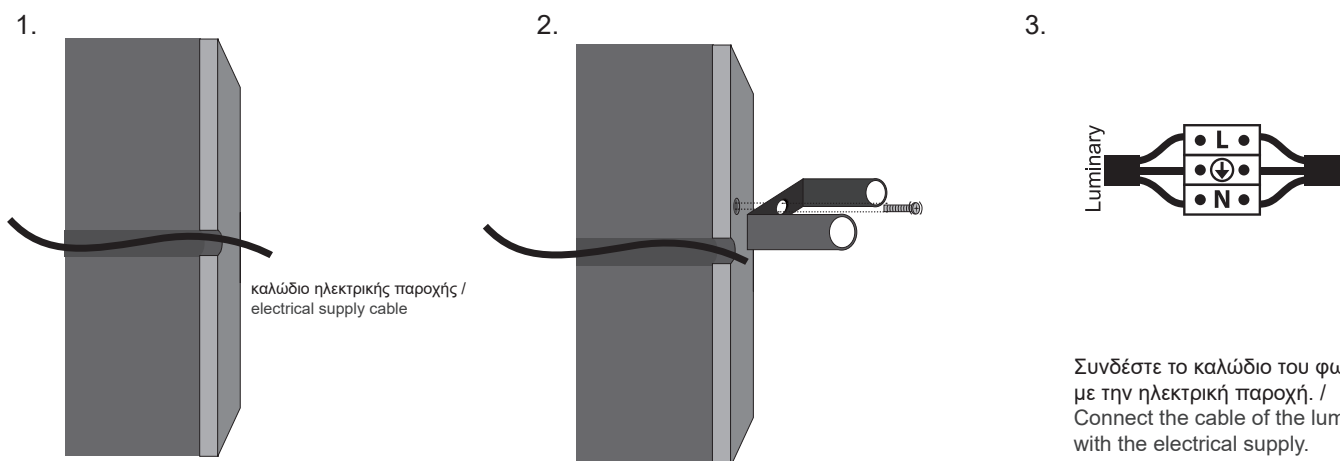


4. Εφαρμογή στον τοίχο / Application on the wall

Εφαρμόστε το φωτιστικό στην τοποθετημένη βάση και βιδώστε το πάνω της μέχρι να σταθεροποιηθεί. / Apply the lamp to the mounted base and tighten it until it is firmly stabilized on the base.

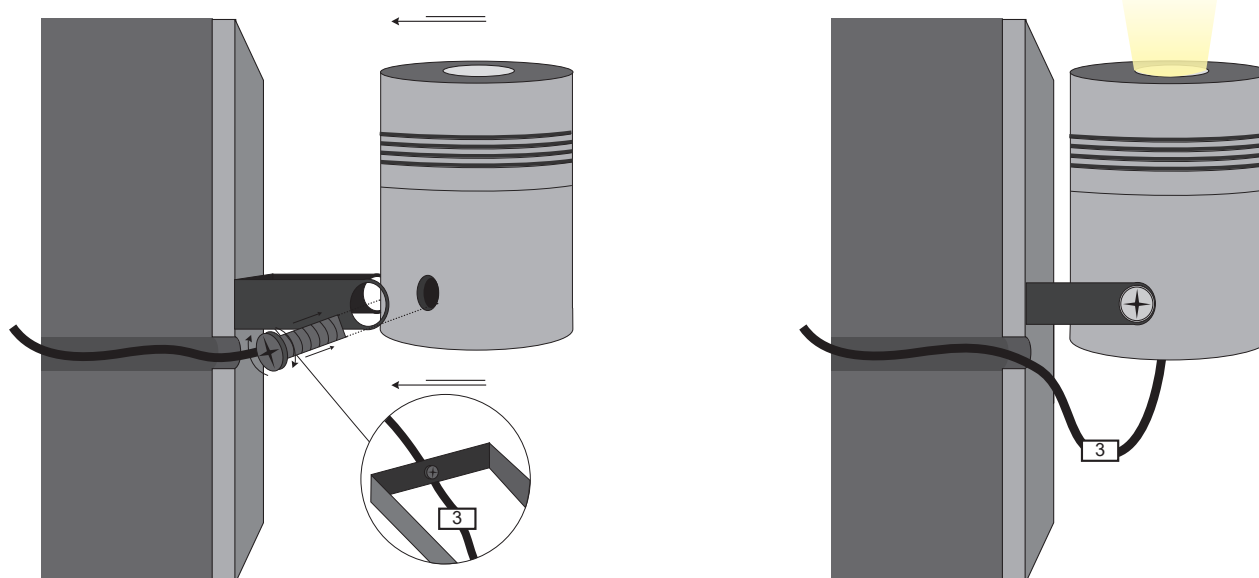

## TUBE R60×80 / Manual

1. Εφαρμογή στο έδαφος /  
Application on the ground

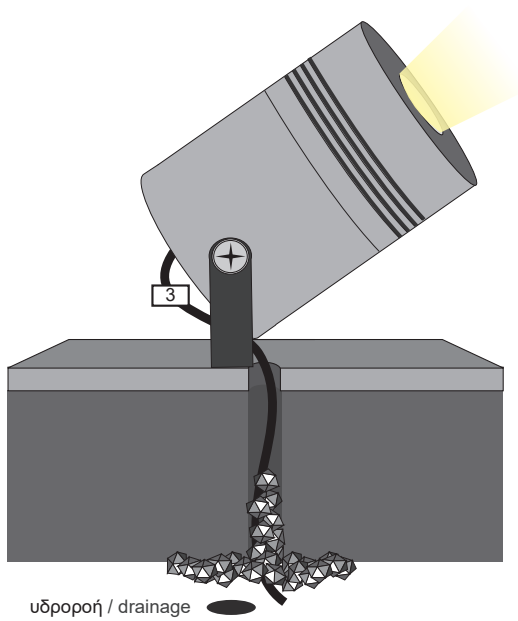

Τα GIDEON 1 RR για εξωτερική χρήση μπορεί επίσης να εφαρμοστεί στο έδαφος με το αξεσουάρ spike (καρφί) /  
GIDEON 1 RR for outdoor use can also be applied on the ground with the spike accessory