


## DIGITAL CONTROLLER 12-24VDC PIXEL2048 DIM RF REMOTE

SKU: AC011003-005

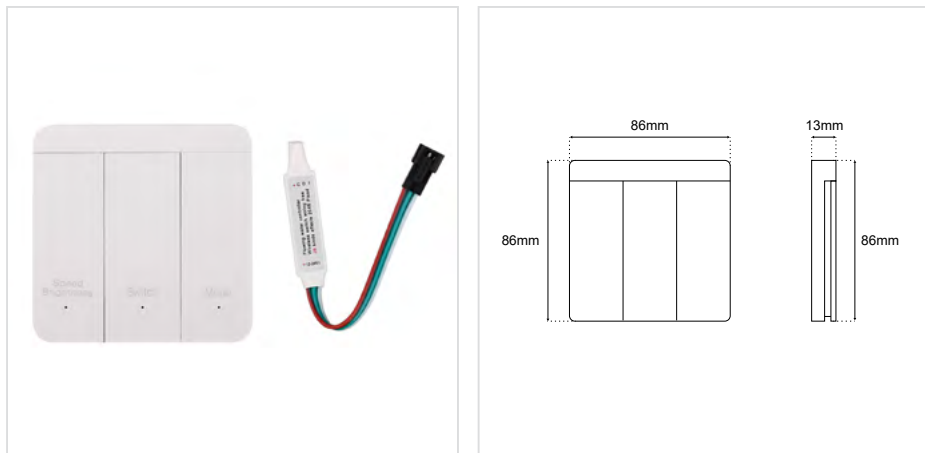

### BASIC PARAMETERS

1. Working voltage: DC 12-24 V
2. Control points: up to 2048 pixels can be controlled
3. Remote control distance: 15m
4. Battery model: 27A 12V
5. Effect mode: 10

### REMOTE SWITCH KEY DESCRIPTION:

When in use, place the indicator light of the remote control switch downward

First button: turn on level 10 speed and turn off level 10 brightness

Second button: power on / off

The third key: 10 modes switching

### METHOD OF ADJUSTING THE NUMBER OF CONTROLLER POINTS:

When the light is off, long press the third key to enter the number adjustment menu.

At this time, press the first key to increase the number of points, and press the third key to decrease the number of points. Long press can quickly adjust. After adjustment, press the on key to save and exit. The default factory 80 pixels, the maximum can be adjusted to 2048 pixels.

## DIGITAL CONTROLLER 12-24VDC PIXEL2048 DIM RF REMOTE

---

### CODE MATCHING AND CLEARING OF CONTROLLER:

---

Code matching: after the controller is powered on, press the power on button for 5 seconds, and the light bar flashes slowly for 3 times.

Clear code: after the controller is powered on, press the power on button for 5 seconds, and the light bar will flash rapidly for 3 times.

### LIST OF MODES:

---

1. Turn on the light and flow water is always on, turn off the light and return.
2. Turn on the light and the water is always on, turn off the light and flow.
3. The water flowing from both ends to the middle is always on, and the light flows back to both ends in the middle.
4. Flowing water from the middle to the two ends is always on, turn off the lights and flow back to the middle.
5. The running water is always on (with breathing gradual change), and it will return when the machine is turned off.
6. 60CM meteor trailing.
7. 120CM trailing water at both ends.
8. 5 ICs chase the horse racing.
9. 2 ICs chase the horse racing.
10. Chasing horse racing + meteor trailing.

# DIGITAL CONTROLLER 12-24VDC PIXEL2048 DIM RF REMOTE

## WIRING DIAGRAM

Connect according to the following diagram.

Each 24V 200W only for 20m.

Add more power supplies to keep the same brightness

