


# OVBRW- 39x70 WALL




## ΠΕΡΙΕΧΟΜΕΝΑ / CONTENT

|           |   |
|-----------|---|
| datasheet | 1 |
| manual    | 2 |

## ΚΩΔΙΚΟΣ / CODE

OVBRW- XX XX XX XXX XX XX XX XX X

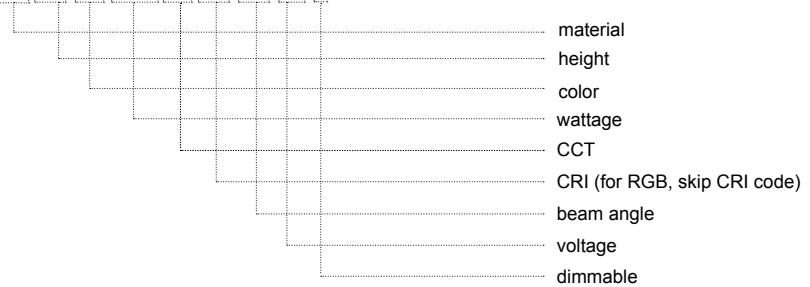

## OVBRW- 1L 39x70 WALL ( OVBRW-) / Datasheet



### general information

|               |                                 |
|---------------|---------------------------------|
| application   | Outdoor / Ceiling / Wall        |
| electric gear | Not included                    |
| life time     | 50.000 hrs                      |
| warranty      | 3-5 years (*5 yrs upon request) |
| origin        | Made in Greece                  |


| material       | height       | color           | wattage | CCT                   | CRI       | beam angle   | voltage     | dimmable   |
|----------------|--------------|-----------------|---------|-----------------------|-----------|--------------|-------------|--|
| Aluminium (01) | 500 (H500)   | Anodised (AL)   | 1W (1W) | 2700K (27K)           | Ra80 (80) | Diffuse (DF) | 12VDC (V1)  | Yes (TRIAC for 230VAC) (D)   |
| Brass (03)     | 1000 (H1000) | Black (BL)      | 2W (2W) | 3000K (30K)           | Ra90 (90) | 8° (8D)      | 24VDC (V2)  | Please get the corresponding <b>Controllers / Dimmers</b> from our wide range of products. |
|                |              | White (WH)      | 3W (3W) | 4000K (40K)           |           | 10° (10D)    | 230VAC (V3) |  |
|                |              | RAL colors (RL) |         | 5000K (50K)           |           | 15° (15D)    |             |  |
|                |              | No color (L)    |         | 6000K (60K)           |           | 20° (20D)    |             |  |
|                |              |                 |         | (R) / (G) / (B) / (A) |           | 24° (24D)    |             |  |
|                |              |                 |         |                       |           | 35° (35D)    |             |  |
|                |              |                 |         |                       |           | 60° (60D)    |             |  |
|                |              |                 |         | 80° (80D)             |           |              |             |  |

Product code generator


OVBRW - material - height - color - wattage - CCT - CRI - beam angle - Voltage - dimmable

(ex. OVBRW-01-H500-BL-3W-27K-80-15D-V1-D) for Oval Branch Wall 39x70 Aluminium 500mm Black 3W 2700K Ra80 15° 12V Dimmable



1. Τοποθετήστε τη βάση στην οροφή. / Place the base on the ceiling.

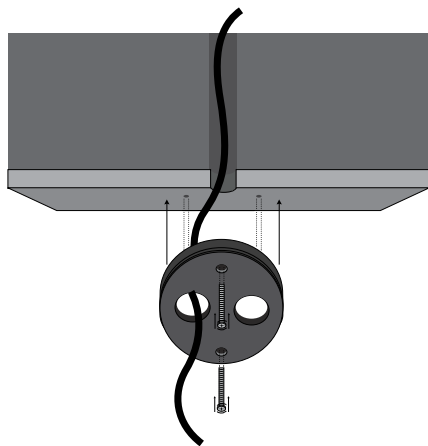


- 2.



Συνδέστε το καλώδιο του φωτιστικού με την ηλεκτρική παροχή. Η σύνδεση πρέπει να είναι στεγανή. / Connect the cable of the luminaire with the electrical supply. The connection must be sealed.

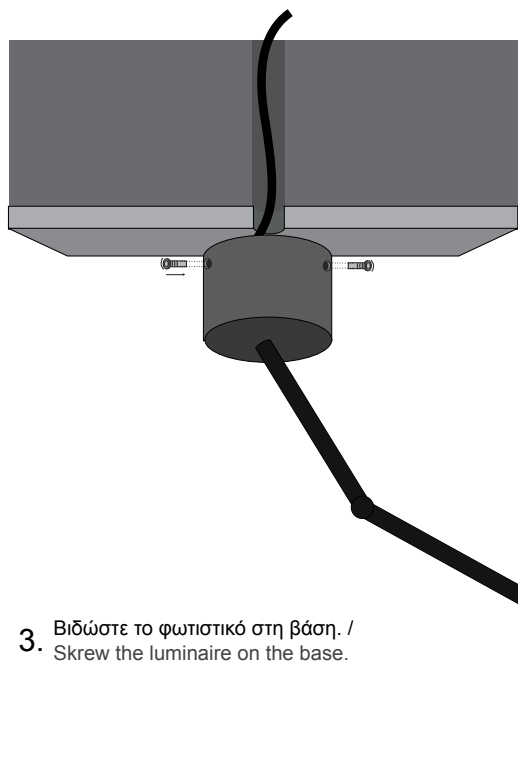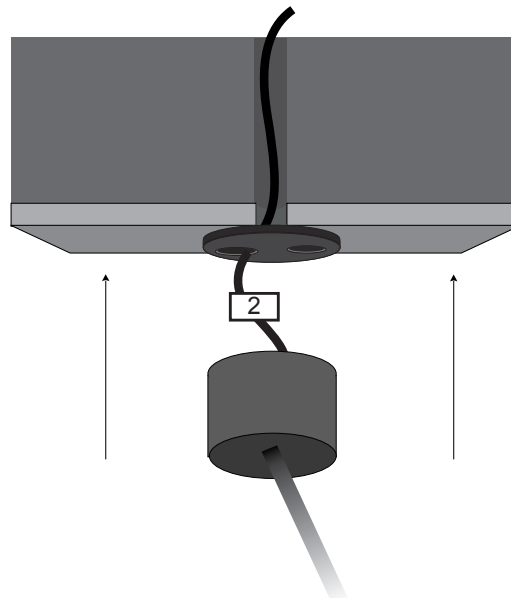

3. Βιδώστε το φωτιστικό στη βάση. / Skrew the luminaire on the base.

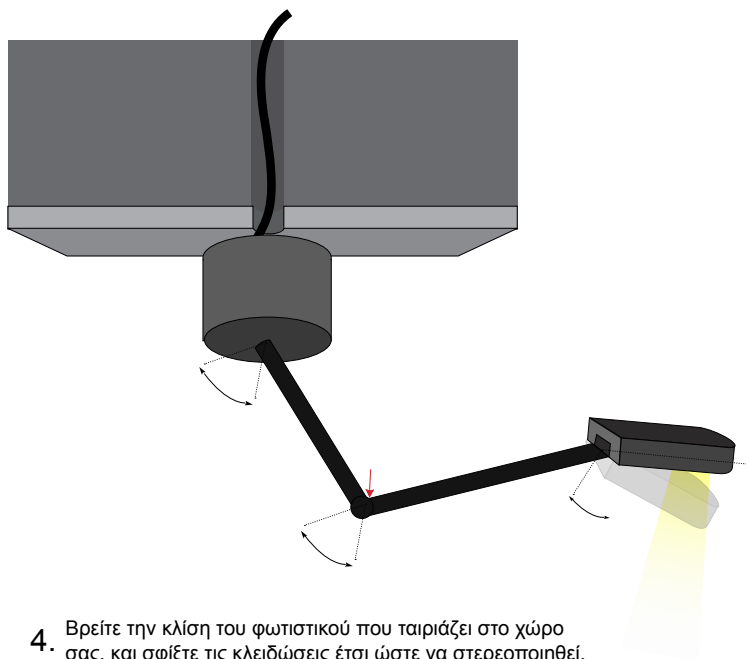

4. Βρείτε την κλίση του φωτιστικού που ταιριάζει στο χώρο σας, και σφίξτε τις κλειδώσεις έτσι ώστε να στερεοποιηθεί. Το φωτιστικό είναι έτοιμο για χρήση. Find the suitable angle for the luminaire according to the space, and tighten the locks until it stabilizes. Luminaire is ready for use.