

CATALOG 2024

POWER SUPPLIES

ΤΡΟΦΟΔΟΤΙΚΑ



light. our passion is



Έκθεση: Ελ. Βενιζέλου και Βύρωνος, 26333 Πάτρα
Βιοτεχνία: Γλαύκου 83, 26332 Πάτρα



2610 317 313
2610 317 300



barislight.eu
b2b.barislight.eu



info@barislight.eu



Baris Light



Power supplies

ΠΕΡΙΕΧΟΜΕΝΑ / CONTENTS

Wifi - Bluetooth - ZIGBEE

200W 1CH



pg. 4

200W 3CH



pg. 4

200W 4CH



pg. 4

200W 5CH



pg. 5

IP20

35W



pg. 6

50W



pg. 6

60W



pg. 6

75W



pg. 7

100W



pg. 7

150W



pg. 7

200W



pg. 8

250W



pg. 8

400W



pg. 8

SLIM IP20

60W



pg. 9

60W



pg. 9

100W



pg. 9

100W



pg. 10

150W



pg. 10

150W



pg. 10

200W



pg. 11

200W



pg. 11

250W



pg. 11

250W



pg. 12

300W



pg. 12

300W



pg. 12

SUPER SLIM IP20

18W



pg. 13

24W



pg. 13

36W



pg. 13

48W



pg. 14

60W



pg. 14

72W



pg. 14

100W



pg. 15

ADAPTER

15W 3A 5V



pg. 16

20W 4A 5V



pg. 16

24W 1A 24V



pg. 16

24W 2A 12V



pg. 16

36W 1.5A 24V



pg. 16

36W 3A 12V



pg. 16

48W 2A 24V



pg. 17

48W 4A 12V



pg. 17

60W 2.5A 24V



pg. 17

60W 5A 12V



pg. 17

72W 3A 24V



pg. 17

72W 6A 12V



pg. 17

96W 4A 24V



pg. 18



pg. 18

IP67

10W



pg. 19

20W



pg. 19

30W



pg. 19

60W



pg. 20

100W



pg. 20

150W



pg. 20

200W



pg. 21

200W



pg. 21

250W




pg. 21



SLIM IP67



DALI+Push Dimmable

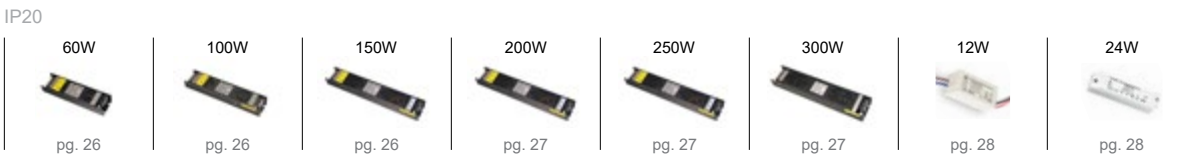

DALI Dimmable



TRIAC & 0/1-10V Dimmable



POWER SUPPLY IP66 24V 200W WIFI & BLUETOOTH 1CH



SKU: Q2011001-003



OUTPUT	DC Voltage	24V
	Rated current	CH1+CH2+CH3+CH4+CH5=8.33A
	Rated power	200W
INPUT	Voltage Range	100-277VAC
	Frequency Range	47 - 63Hz
	Power Factor	PF≥0.98/ 230VAC (Full loading)
Dimming function		Wifi or Bluetooth wireless dim.
Dimensions		279×78×25.1mm (L×W×H)

POWER SUPPLY IP66 24V 200W WIFI & BLUETOOTH 3CH




SKU: Q2011001-004



OUTPUT	DC Voltage	24V
	Rated current	CH1+CH2+CH3+CH4+CH5=8.33A
	Rated power	200W
INPUT	Voltage Range	100-277VAC
	Frequency Range	47 - 63Hz
	Power Factor	PF≥0.98/ 230VAC (Full loading)
Dimming function		Wifi or Bluetooth wireless dim.
Dimensions		279×78×25.1mm (L×W×H)

POWER SUPPLY IP66 24V 200W WIFI & BLUETOOTH 4CH



SKU: Q2011001-005



OUTPUT	DC Voltage	24V
	Rated current	CH1+CH2+CH3+CH4+CH5=8.33A
	Rated power	200W
INPUT	Voltage Range	100-277VAC
	Frequency Range	47 - 63Hz
	Power Factor	PF≥0.98/ 230VAC (Full loading)
Dimming function		Wifi or Bluetooth wireless dim.
Dimensions		279×78×25.1mm (L×W×H)


POWER SUPPLY IP66 24V 200W WIFI & BLUETOOTH 5CH




SKU: Q2011001-006



OUTPUT	DC Voltage	24V
	Rated current	CH1+CH2+CH3+CH4+CH5=8.33A
	Rated power	200W
INPUT	Voltage Range	100-277VAC
	Frequency Range	47 - 63Hz
	Power Factor	PF≥0.98/ 230VAC (Full loading)
Dimming function		Wifi or Bluetooth wireless dim.
Dimensions		279×78×25.1mm (L×W×H)

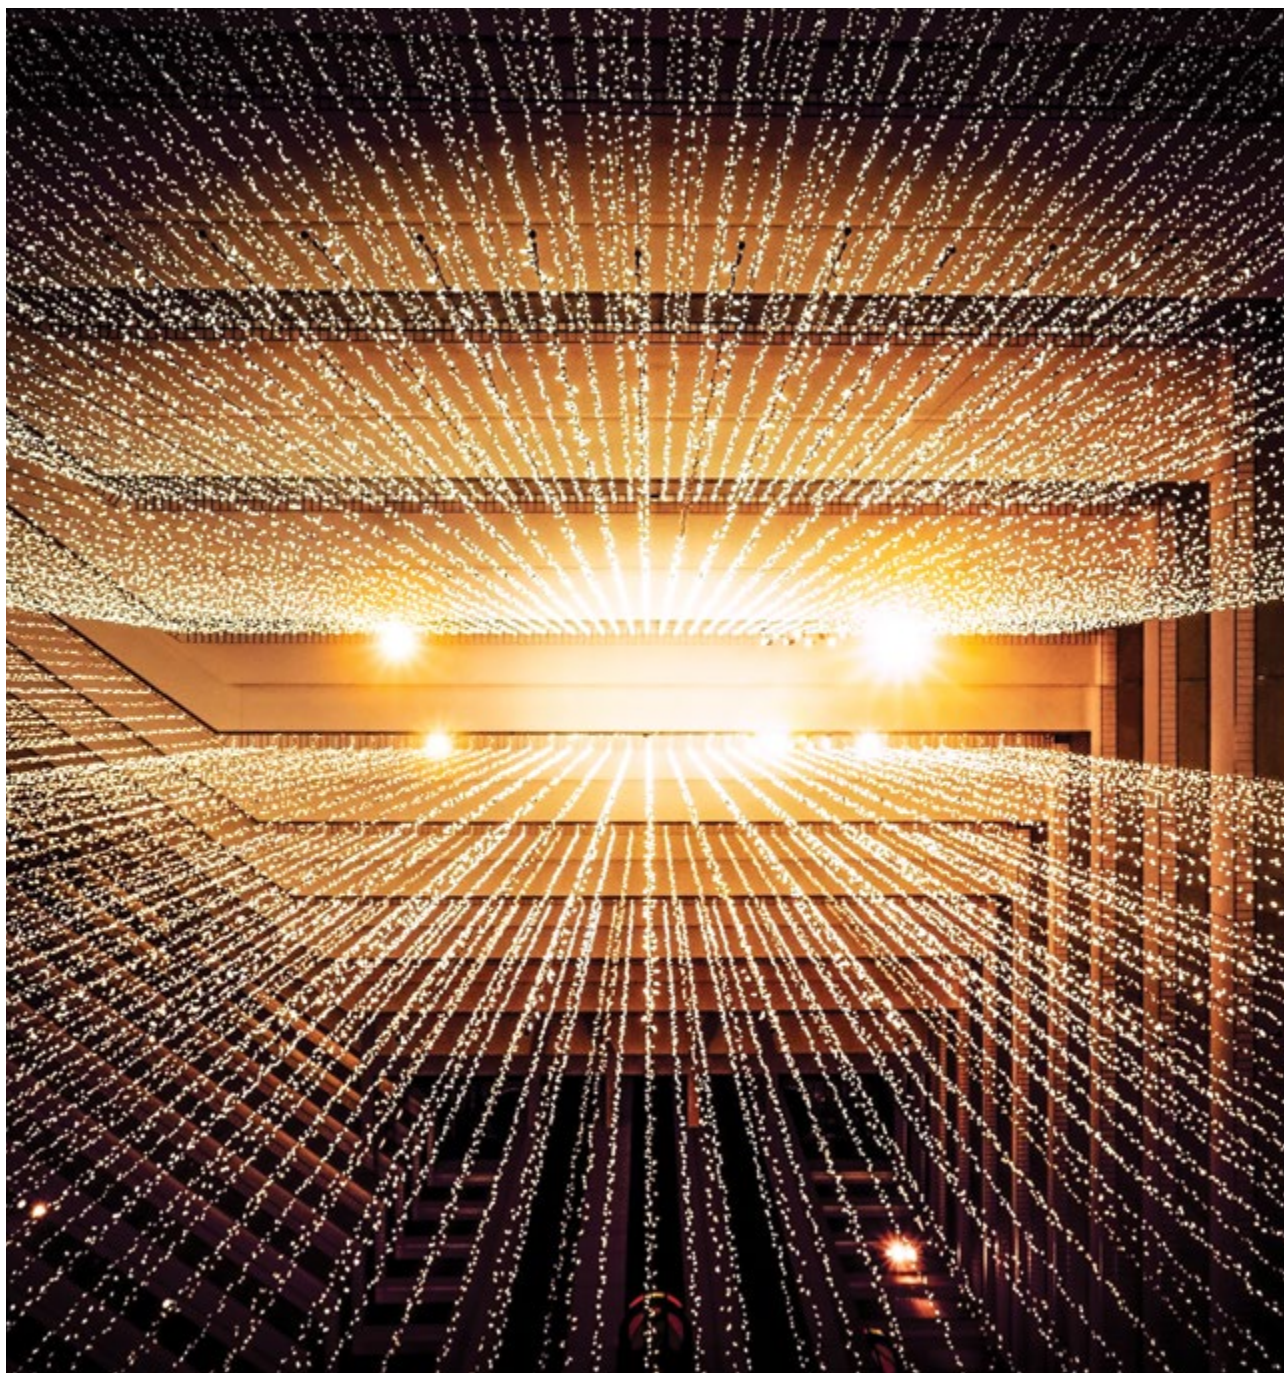

POWER SUPPLY IP20 35W 100-264VAC




SKU: W6011001-029 (12V), W6011001-030 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 2.9A	0 - 1.46A
	Rated power	35W	
INPUT	Voltage Range	100 - 264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5 / 220VAC (Full loading)	
Dimensions		104×82×30mm (L×W×H)	

POWER SUPPLY IP20 50W 100-264VAC




SKU: W6011001-031 (12V), W6011001-032 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 4.2A	0 - 2.1A
	Rated power	50W	
INPUT	Voltage Range	100 - 264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5 / 220VAC (Full loading)	
Dimensions		104×82×30mm (L×W×H)	

POWER SUPPLY IP20 60W 100-264VAC




SKU: W6011001-127 (12V), W6011001-128 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 5A	0 - 2.5A
	Rated power	60W	
INPUT	Voltage Range	100 - 264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5 / 220VAC (Full loading)	
Dimensions		104×82×30mm (L×W×H)	

POWER SUPPLY IP20 75W 100-264VAC




SKU: W6011001-033 (12V), W6011001-034 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 6.3A	0 - 3.1A
	Rated power	75W	
INPUT	Voltage Range	100 - 264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5 / 220VAC (Full loading)	
Dimensions		104×98×30mm (L×W×H)	

POWER SUPPLY IP20 100W 100-264VAC




SKU: W6011001-035 (12V), W6011001-036 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 6.3A	0 - 3.1A
	Rated power	75W	
INPUT	Voltage Range	100 - 264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5 / 220VAC (Full loading)	
Dimensions		134×97×30mm (L×W×H)	

POWER SUPPLY IP20 150W 110/220VAC




SKU: W6011001-037 (12V), W6011001-038 (24V), W6011001-129 (48V)



OUTPUT	DC Voltage	12V	24V	48V
	Rated current	0-12.5A	0-6.25A	0-3.12A
	Rated power	150W		
INPUT	Voltage Range	110/220V by switch		
	Frequency Range	50 - 60HZ		
	Power Factor	PF≥0.5 / 220VAC (Full loading)		
Dimensions		163×97×30mm (L×W×H)	159×97×30mm (L×W×H)	

POWER SUPPLY IP20 200W 110/220VAC




SKU: W6011001-039 (12V), W6011001-040 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0-16.7A	0-8.3A
	Rated power	200W	
INPUT	Voltage Range	110/220V by switch	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5 / 220VAC (Full loading)	
Dimensions		163×97×30mm (L×W×H)	

POWER SUPPLY IP20 250W 110/220VAC




SKU: W6011001-088 (12V), W6011001-087 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0-20.8A	0-10.4A
	Rated power	250W	
INPUT	Voltage Range	110/220V by switch	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5 / 220VAC (Full loading)	
Dimensions		215×115×30mm (L×W×H)	

POWER SUPPLY IP20 400W 110/220VAC




SKU: W6011001-042 (12V), W6011001-041 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0-33.3A	0-16.7A
	Rated power	400W	
INPUT	Voltage Range	110/220V by switch	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5 / 220VAC (Full loading)	
Dimensions		215×115×30mm (L×W×H)	

POWER SUPPLY SLIM IP20 60W 100-264VAC




SKU: W6011001-021 (12V), W6011001-022 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 5A	0 - 2.5A
	Rated power	60W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/220VAC (Full loading)	
Dimensions		160×40×33mm (L×W×H)	

POWER SUPPLY ULTRA THIN IP20 60W 100-264VAC




SKU: W6011001-157 (12V), W6011001-158 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 5A	0 - 2.5A
	Rated power	60W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/220VAC (Full loading)	
Dimensions		160×35×22mm (L×W×H)	

POWER SUPPLY SLIM IP20 100W 100-264VAC




SKU: W6011001-067 (12V), W6011001-068 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 8.3A	0 - 4.2A
	Rated power	100W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/220VAC (Full loading)	
Dimensions		188×46×36mm (L×W×H)	

POWER SUPPLY SLIM IP20 100W 100-264VAC




SKU: W6011001-023 (12V), W6011001-024 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 8.3A	0 - 4.2A
	Rated power	100W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/230VAC (Full loading)	
Dimensions		225×53×18.5mm (L×W×H)	

POWER SUPPLY SLIM IP20 150W 100-264VAC




SKU: W6011001-069 (12V), W6011001-070 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 12.5A	0 - 6.3A
	Rated power	100W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/250VAC (Full loading)	
Dimensions		200×58×38mm (L×W×H)	

POWER SUPPLY SLIM IP20 150W 100-264VAC




SKU: W6011001-025 (12V), W6011001-026 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 12.5A	0 - 6.25A
	Rated power	150W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/230VAC (Full loading)	
Dimensions		215×115×30mm (L×W×H)	

POWER SUPPLY SLIM IP20 200W 170-264VAC




SKU: W6011001-071 (12V), W6011001-072 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 16.7A	0 - 8.3A
	Rated power	200W	
INPUT	Voltage Range	170-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/220VAC (Full loading)	
Dimensions		224×71×40mm (L×W×H)	

POWER SUPPLY SLIM IP20 200W 170-264VAC




SKU: W6011001-027 (12V), W6011001-028 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 16.7A	0 - 8.3A
	Rated power	200W	
INPUT	Voltage Range	170-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/230VAC (Full loading)	
Dimensions		309×53×22mm (L×W×H)	

POWER SUPPLY SLIM IP20 250W 170-264VAC No FAN




SKU: W6011001-073 (12V), W6011001-074 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0-20.8A	0-10.4A
	Rated power	250W	
INPUT	Voltage Range	170 - 264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5 / 220VAC (Full loading)	
Dimensions		224×71×40mm (L×W×H)	

POWER SUPPLY SLIM IP20 250W 170-264VAC No FAN HRL




SKU: W6011001-147 (12V), W6011001-148 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 20.8A	0 - 10.4A
	Rated power	250W	
INPUT	Voltage Range	170-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/220VAC (Full loading)	
Dimensions		208×63×29mm (L×W×H)	

POWER SUPPLY SLIM IP20 300W 170-264VAC No FAN



SKU: W6011001-118 (12V), W6011001-117 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 25A	0 - 12.5A
	Rated power	300W	
INPUT	Voltage Range	170-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/220VAC (Full loading)	
Dimensions		227×63×29mm (L×W×H)	

POWER SUPPLY SLIM IP20 300W 170-264VAC NO FAN




SKU: W6011001-075 (12V), W6011001-076 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0-25A	0-12.5A
	Rated power	300W	
INPUT	Voltage Range	170 - 264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5 / 220VAC (Full loading)	
Dimensions		224×69×46mm (L×W×H)	

POWER SUPPLY SUPER SLIM IP20 18W 100-264VAC




SKU: W6011001-059 (12V), W6011001-060 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 1.5A	0 - 0.75A
	Rated power	18W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/220VAC(Full loading)	
Dimensions		210×18×15mm (L×W×H)	

POWER SUPPLY SUPER SLIM IP20 24W 100-264VAC




SKU: W6011001-061 (12V), W6011001-062 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 2A	0 - 1A
	Rated power	24W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/220VAC (Full loading)	
Dimensions		210×18×15mm (L×W×H)	

POWER SUPPLY SUPER SLIM IP20 36W 100-264VAC




SKU: W6011001-063 (12V), W6011001-064 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 3A	0 - 1.5A
	Rated power	36W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5 / 220VAC (Full loading)	
Dimensions		268×18×15mm (L×W×H)	

POWER SUPPLY SUPER SLIM IP20 48W 100-264VAC




SKU: W6011001-065 (12V), W6011001-066 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 4A	0 - 2A
	Rated power	48W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5 / 220VAC (Full loading)	
Dimensions		298×18×15mm (L×W×H)	

POWER SUPPLY SUPER SLIM IP20 60W 100-264VAC




SKU: W6011001-098 (12V), W6011001-048 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 5A	0 - 2.5A
	Rated power	60W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/220VAC(Full loading)	
Dimensions		350×18×15mm (L×W×H)	

POWER SUPPLY SUPER SLIM IP20 72W 100-264VAC



SKU: W6011001-130 (12V), W6011001-131 (24V)




OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 6A	0 - 3A
	Rated power	72W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/220VAC (Full loading)	
Dimensions		400×18×15mm (L×W×H)	


POWER SUPPLY SUPER SLIM IP20 100W 100-264VAC



SKU: W6011001-100 (12V), W6011001-099 (24V)

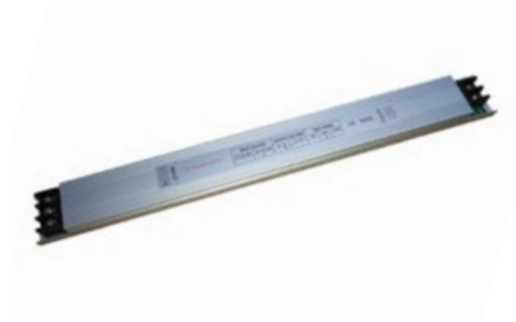

OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 8.3A	0 - 4.2A
	Rated power	100W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/220VAC (Full loading)	
Dimensions		370×36×16.5mm (L×W×H)	

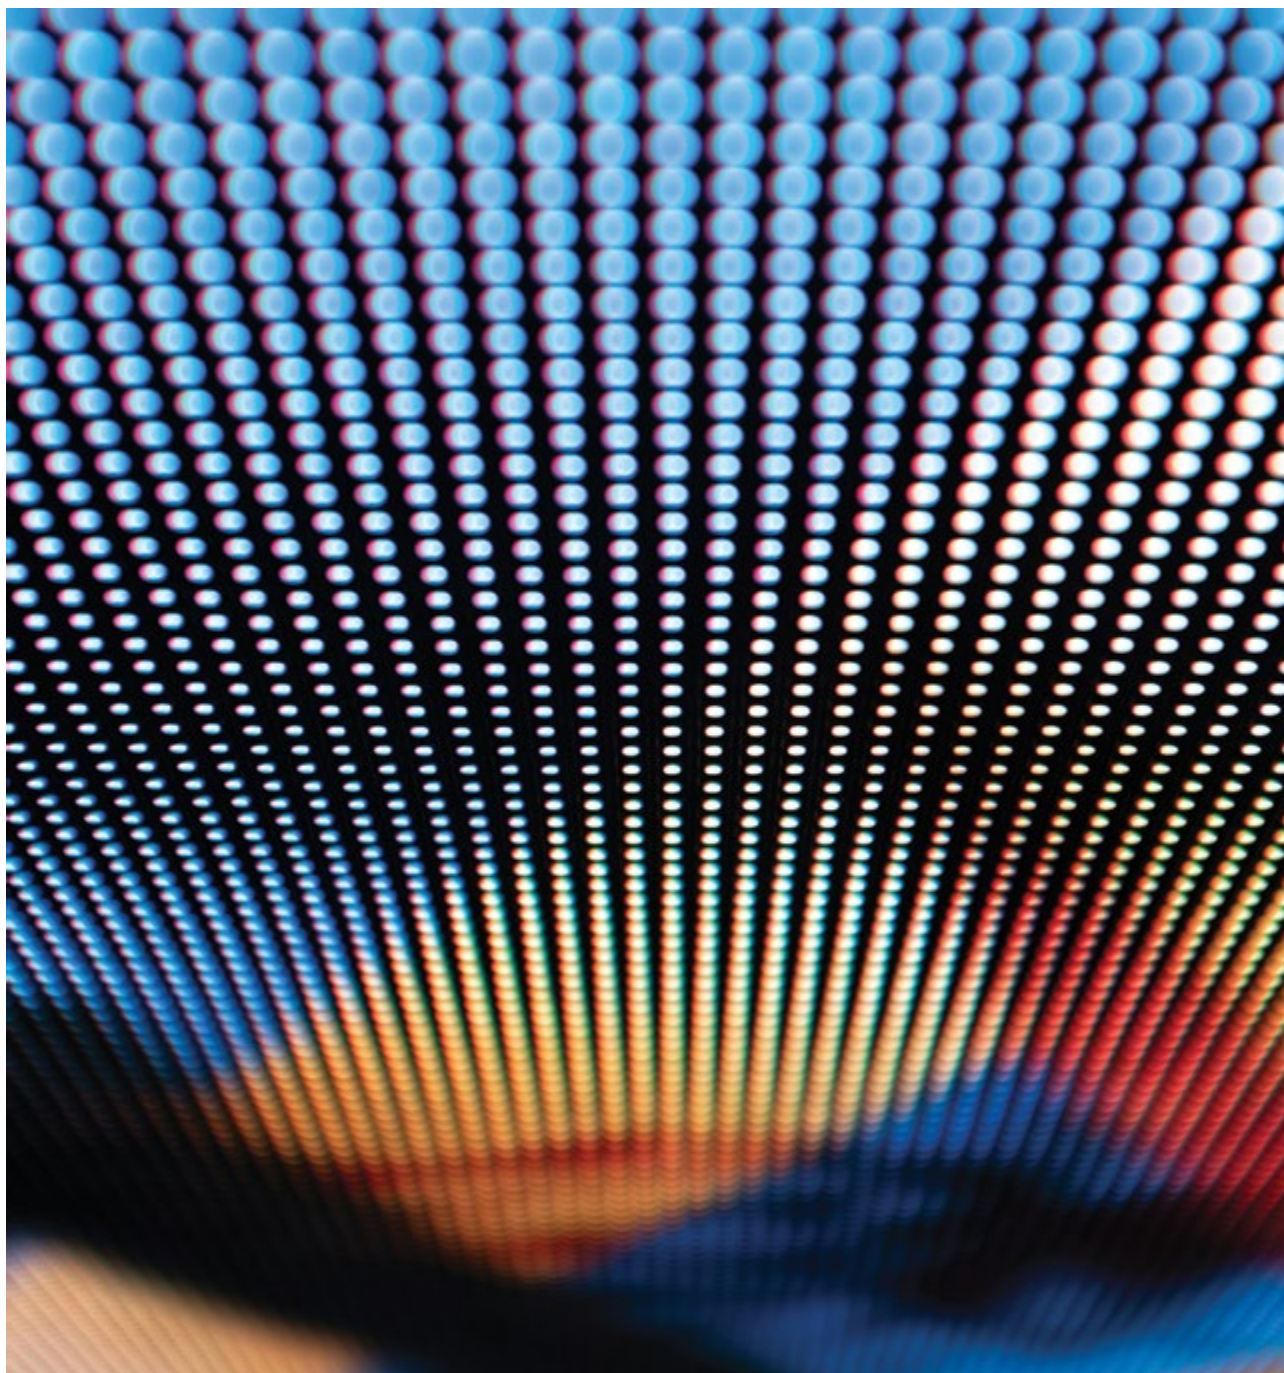

LED ADAPTER 15W 3A 5V INPUT 100-240VAC



SKU: W6011001-051



OUTPUT	DC Voltage	5V	INPUT	Voltage Range	100-240VAC
	Rated current	0 - 3A		Frequency Range	50 - 60HZ
	Rated power	15W		Dimensions	75×40×30mm (L×W×H)

LED ADAPTER 20W 4A 5V INPUT 100-240VAC



SKU: W6011001-138



OUTPUT	DC Voltage	5V	INPUT	Voltage Range	100-240VAC
	Rated current	0 - 4A		Frequency Range	50 - 60HZ
	Rated power	20W		Dimensions	93.5×53.5×33mm (L×W×H)

LED ADAPTER 24W 1A 24V INPUT 100-240VAC



SKU: W6011001-050



OUTPUT	DC Voltage	24V	INPUT	Voltage Range	100-240VAC
	Rated current	0 - 1A		Frequency Range	50 - 60HZ
	Rated power	24W		Dimensions	83×43.5×31mm (L×W×H)

LED ADAPTER 24W 2A 12V INPUT 100-240VAC



SKU: W6011001-049



OUTPUT	DC Voltage	12V	INPUT	Voltage Range	100-240VAC
	Rated current	0 - 2A		Frequency Range	50 - 60HZ
	Rated power	24W		Dimensions	83×43.5×31mm (L×W×H)

LED ADAPTER 36W 1.5A 24V INPUT 100-240VAC



SKU: W6011001-139



OUTPUT	DC Voltage	24V	INPUT	Voltage Range	100-240VAC
	Rated current	0 - 1.5A		Frequency Range	50 - 60HZ
	Rated power	36W		Dimensions	93.5×53.5×33mm (L×W×H)

LED ADAPTER 36W 3A 12V INPUT 100-240VAC



SKU: W6011001-052



OUTPUT	DC Voltage	12V	INPUT	Voltage Range	100-240VAC
	Rated current	0 - 3A		Frequency Range	50 - 60HZ
	Rated power	36W		Dimensions	93.5×43.5×33mm (L×W×H)

LED ADAPTER 48W 2A 24V INPUT 100-240VAC



SKU: W6011001-141



OUTPUT	DC Voltage	24V	INPUT	Voltage Range	100-240VAC
	Rated current	0 - 2A		Frequency Range	50 - 60HZ
	Rated power	48W		Dimensions	114.4×50×30mm (L×W×H)

LED ADAPTER 48W 4A 12V INPUT 100-240VAC



SKU: W6011001-140



OUTPUT	DC Voltage	12V	INPUT	Voltage Range	100-240VAC
	Rated current	0 - 4A		Frequency Range	50 - 60HZ
	Rated power	48W		Dimensions	114.4×50×30mm (L×W×H)

LED ADAPTER 60W 2.5A 24V INPUT 100-240VAC



SKU: W6011001-142



OUTPUT	DC Voltage	24V	INPUT	Voltage Range	100-240VAC
	Rated current	0 - 2.5A		Frequency Range	50 - 60HZ
	Rated power	60W		Dimensions	119×53×34 mm (L×W×H)

LED ADAPTER 60W 5A 12V INPUT 100-240VAC



SKU: W6011001-095



OUTPUT	DC Voltage	12V	INPUT	Voltage Range	100-240VAC
	Rated current	0 - 5A		Frequency Range	50 - 60HZ
	Rated power	60W		Dimensions	118×53×34mm (L×W×H)

LED ADAPTER 72W 3A 24V INPUT 100-240VAC



SKU: W6011001-144



OUTPUT	DC Voltage	24V	INPUT	Voltage Range	100-240VAC
	Rated current	0 - 3A		Frequency Range	50 - 60HZ
	Rated power	72W		Dimensions	119×53.2×34mm (L×W×H)

LED ADAPTER 72W 6A 12V INPUT 100-240VAC



SKU: W6011001-143



OUTPUT	DC Voltage	12V	INPUT	Voltage Range	100-240VAC
	Rated current	0 - 6A		Frequency Range	50 - 60HZ
	Rated power	72W		Dimensions	119×53.2×34mm (L×W×H)

LED ADAPTER 96W 4A 24V INPUT 100-240VAC



SKU: W6011001-146



OUTPUT	DC Voltage	24V	INPUT	Voltage Range	100-240VAC
	Rated current	0 - 4A		Frequency Range	50 - 60HZ
	Rated power	96W		Dimensions	140×60×37(mm (L×W×H))

LED ADAPTER 96W 8A 12V INPUT 100-240VAC




SKU: W6011001-145



OUTPUT	DC Voltage	12V	INPUT	Voltage Range	100-240VAC
	Rated current	0 - 8A		Frequency Range	50 - 60HZ
	Rated power	96W		Dimensions	140×60×37mm (L×W×H)



POWER SUPPLY IP67 10W 100-264VAC




SKU: W6011001-109 (12V), W6011001-110 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 0.83A	0 - 0.42A
	Rated power	10W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/220VAC (Full loading)	
Dimensions		116×30×20mm (L×W×H)	

POWER SUPPLY IP67 20W 100-264VAC




SKU: W6011001-111 (12V), W6011001-112 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 1.67A	0 - 0.83A
	Rated power	20W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/220VAC (Full loading)	
Dimensions		180×30×20mm (L×W×H)	

POWER SUPPLY IP67 30W 100-264VAC




SKU: W6011001-113 (12V), W6011001-114 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 2.5A	0 - 1.25A
	Rated power	30W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/220VAC (Full loading)	
Dimensions		172×34×24mm (L×W×H)	

POWER SUPPLY IP67 60W 100-264VAC




SKU: W6011001-135 (12V), W6011001-134 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 5A	0 - 2.5A
	Rated power	60W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/220VAC (Full loading)	
Dimensions		183×34×24mm (L×W×H)	

POWER SUPPLY IP67 100W 100-264VAC




SKU: W6011001-137 (12V), W6011001-136 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 0.83A	0 - 0.42A
	Rated power	100W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/220VAC (Full loading)	
Dimensions		207×67×37mm (L×W×H)	

POWER SUPPLY IP67 150W 100-264VAC




SKU: W6011001-123 (12V), W6011001-124 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 12.5A	0 - 6.3A
	Rated power	150W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/220VAC (Full loading)	
Dimensions		207×67×37mm (L×W×H)	

POWER SUPPLY IP67 200W 170-264VAC



SKU: W6011001-125 (12V), W6011001-132 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 16.7A	0 - 8.3A
	Rated power	200W	
INPUT	Voltage Range	170-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/220VAC (Full loading)	
Dimensions		218x73x42mm (L×W×H)	

POWER SUPPLY IP67 200W 24V 100-260VAC




SKU: AF011001-013



OUTPUT	DC Voltage	24V
	Rated current	0 - 8.33A
	Rated power	200W
INPUT	Voltage Range	100-240VAC
	Frequency Range	50 - 60HZ
Dimensions		255x62x32mm (L×W×H)

POWER SUPPLY IP67 250W 170-264VAC



SKU: W6011001-126 (12V), W6011001-122 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 20.8A	0 - 10.4A
	Rated power	250W	
INPUT	Voltage Range	170-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/220VAC (Full loading)	
Dimensions		218x73x42mm (L×W×H)	

POWER SUPPLY IP67 300W 170-264VAC



SKU: W6011001-133(12V), W6011001-097 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 25A	0 - 12.5A
	Rated power	300W	
INPUT	Voltage Range	170-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/220VAC (Full loading)	
Dimensions		315×62×30mm (L×W×H)	

POWER SUPPLY IP67 300W 24V 100-260VAC




SKU: AF011001-014



OUTPUT	DC Voltage	24V	
	Rated current	0 - 12.5A	
	Rated power	200W	
INPUT	Voltage Range	100-240VAC	
	Frequency Range	50 - 60HZ	
Dimensions		255x73x35mm (L×W×H)	

POWER SUPPLY IP67 400W 170-264VAC




SKU: W6011001-089 (12V), W6011001-090 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 33.3A	0 - 16.7A
	Rated power	400W	
INPUT	Voltage Range	170-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/220VAC (Full loading)	
Dimensions		245×97×38mm (L×W×H)	

POWER SUPPLY IP67 500W 170-264VAC




SKU: W6011001-091 (12V), W6011001-092 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 41.67A	0 - 20.83A
	Rated power	500W	
INPUT	Voltage Range	170-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/220VAC (Full loading)	
Dimensions		260×120×55mm (L×W×H)	

POWER SUPPLY IP67 600W 170-264VAC



SKU: W6011001-093 (12V), W6011001-094 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 50A	0 - 25A
	Rated power	600W	
INPUT	Voltage Range	170-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/220VAC (Full loading)	
Dimensions		290×120×55mm (L×W×H)	

POWER SUPPLY IP67 60W SLIM INPUT 100-264VAC




SKU: W6011001-009 (12V), W6011001-010 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 5A	0 - 2.5A
	Rated power	60W	
INPUT	Voltage Range	100-240VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/220VAC (Full loading)	
Dimensions		175×58×25mm (L×W×H)	

POWER SUPPLY IP67 100W SLIM INPUT 100-264VAC




SKU: W6011001-011 (12V), W6011001-012 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 8.3A	0 - 4.2A
	Rated power	100W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/220VAC (Full loading)	
Dimensions		215×58×25mm (L×W×H)	

POWER SUPPLY IP67 150W SLIM INPUT 100-264VAC




SKU: W6011001-013 (12V), W6011001-014 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 12.5A	0 - 6.3A
	Rated power	150W	
INPUT	Voltage Range	100-264AC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/220VAC (Full loading)	
Dimensions		260×58×25mm (L×W×H)	

POWER SUPPLY IP67 200W SLIM INPUT 170-264VAC




SKU: W6011001-015 (12V), W6011001-016 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 16.7A	0 - 8.3A
	Rated power	200W	
INPUT	Voltage Range	170-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/220VAC (Full loading)	
Dimensions		301×58×25mm (L×W×H)	

POWER SUPPLY IP67 250W SLIM INPUT 170-264VAC




SKU: W6011001-017 (12V), W6011001-018 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 20.8A	0 - 10.4A
	Rated power	250W	
INPUT	Voltage Range	170-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/220VAC (Full loading)	
Dimensions		319×58×25mm (L×W×H)	

POWER SUPPLY IP67 300W SLIM INPUT 170-264VAC




SKU: W6011001-019 (12V), W6011001-020 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 25A	0 - 12.5A
	Rated power	300W	
INPUT	Voltage Range	170-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/220VAC (Full loading)	
Dimensions		352×58×25mm (L×W×H)	

LED POWER SUPPLY 60W DALI+PUSH IP20




SKU: AF011001-001 (12V), AF011001-002 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	5A	2.5A
	Rated power	60W	
INPUT	Voltage Range	200~240VAC	
	Frequency Range	47~63HZ	
Dimensions		187×48×29mm (L×W×H)	

LED POWER SUPPLY 100W DALI+PUSH IP20




SKU: AF011001-003 (12V), AF011001-004 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	8.3A	4.17A
	Rated power	100W	
INPUT	Voltage Range	200~240VAC	
	Frequency Range	47~63HZ	
Dimensions		231×48×29mm (L×W×H)	

LED POWER SUPPLY 150W DALI+PUSH IP20




SKU: AF011001-005 (12V), AF011001-006 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	12.5A	6.25A
	Rated power	150W	
INPUT	Voltage Range	200~240VAC	
	Frequency Range	47~63HZ	
Dimensions		287×48×29 mm (L×W×H)	

LED POWER SUPPLY 200W DALI+PUSH IP20




SKU: AF011001-007 (12V), AF011001-008 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	16.7A	8.3A
	Rated power	200W	
INPUT	Voltage Range	200~240VAC	
	Frequency Range	47~63HZ	
Dimensions		287×48×29mm (L×W×H)	

LED POWER SUPPLY 250W DALI+PUSH IP20




SKU: AF011001-009 (12V), AF011001-010 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	20.8A	10.4A
	Rated power	250W	
INPUT	Voltage Range	200~240VAC	
	Frequency Range	47~63HZ	
Dimensions		187×48×29mm (L×W×H)	

LED POWER SUPPLY 300W DALI+PUSH IP20



SKU: AF011001-011 (12V), AF011001-012 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	25A	12.5A
	Rated power	300W	
INPUT	Voltage Range	200~240VAC	
	Frequency Range	47~63HZ	
Dimensions		295×60×30mm (L×W×H)	

DALI CV DRIVER 12W 12V



SKU: F6011002-004



OUTPUT	DC Voltage	12V
	Rated current	1A
	Rated power	12W
INPUT	Voltage Range	220VAC-240VAC
	Frequency Range	50/60Hz
Dimensions		78×36×29mm (L×W×H)

DALI CV DRIVER 24W 24VDC



SKU: F6011002-005



OUTPUT	DC Voltage	24V
	Rated current	1A
	Rated power	24W
INPUT	Voltage Range	220VAC-240VAC
	Frequency Range	50/60Hz
Dimensions		150×42.5×28.5mm (L×W×H)

POWER SUPPLY IP20 60W DALI DT8 (CCT) 100-264VAC



SKU: W6011001-149 (12V), W6011001-150 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	5A	2.5A
	Rated power	60W	
INPUT	Voltage Range	100~264VAC	
	Frequency Range	50~60HZ	
Dimensions		187×49×29mm (L×W×H)	

POWER SUPPLY IP20 100W DALI DT8 (CCT) 100-264VAC




SKU: W6011001-151 (12V), W6011001-152 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	8.3A	4.2A
	Rated power	100W	
INPUT	Voltage Range	100~264VAC	
	Frequency Range	50~60HZ	
Dimensions		230×49×29mm (L×W×H)	

POWER SUPPLY IP20 150W DALI DT8 (CCT) 100-264VAC



SKU: W6011001-153 (12V), W6011001-154 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	12.5A	6.25A
	Rated power	150W	
INPUT	Voltage Range	100~264VAC	
	Frequency Range	50~60HZ	
Dimensions		287×49×29mm (L×W×H)	


POWER SUPPLY IP20 200W DALI DT8 (CCT) 170-264VAC



SKU: W6011001-155 (12V), W6011001-156 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	16.7A	8.3A
	Rated power	200W	
INPUT	Voltage Range	170~264VAC	
	Frequency Range	50~60HZ	
Dimensions		287×49×29mm (L×W×H)	

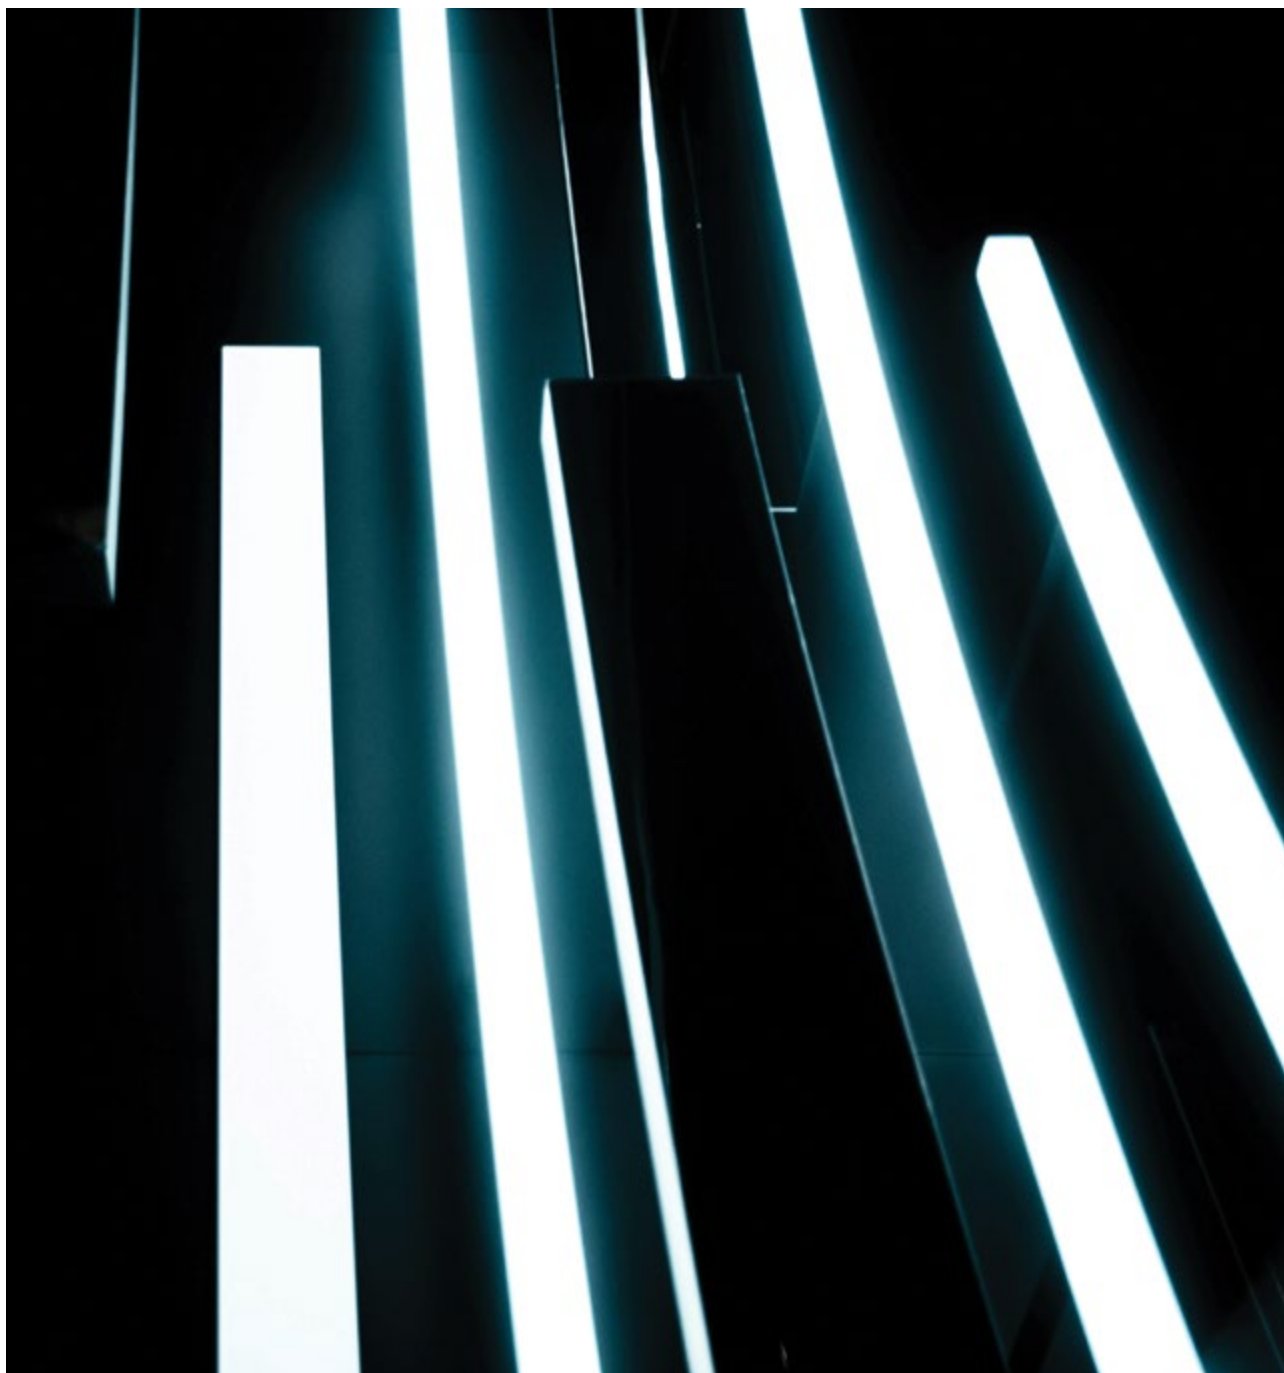

POWER SUPPLY IP66 24V 150W DALI-2 & PUSH 2 IN 1 DIM



SKU: Q2011001-001



OUTPUT	DC Voltage	24V
	Rated current	6.25A
	Rated power	150W
INPUT	Voltage Range	100-277VAC
	Frequency Range	47-63Hz
	Power Factor	PF≥0.97@230VAC
Dimensions		279×78×25.1mm (L×W×H)

POWER SUPPLY IP66 24V 200W DALI-2 & PUSH 2 IN 1 DIM




SKU: Q2011001-002



OUTPUT	DC Voltage	24V
	Rated current	8.33A
	Rated power	200W
INPUT	Voltage Range	100-277VAC
	Frequency Range	47-63Hz
	Power Factor	PF≥0.98@230VAC
Dimensions		330×300×215mm (L×W×H)

POWER SUPPLY IP20 60W DALI 100-264VAC




SKU: W6011001-078 (12V), W6011001-079 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 5A	0 - 2.5A
	Rated power	60W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/220VAC (Full loading)	
Dimensions		187×49×29mm (L×W×H)	

POWER SUPPLY IP20 100W DALI 100-264VAC



SKU: W6011001-080 (12V), W6011001-081 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 8.3A	0 - 4.2A
	Rated power	100W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/220VAC (Full loading)	
Dimensions		230×49×29mm (L×W×H)	

POWER SUPPLY IP20 150W DALI 100-264VAC




SKU: W6011001-082 (12V), W6011001-083 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 12.5A	0 - 6.25A
	Rated power	150W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/220VAC (Full loading)	
Dimensions		287×49×29mm (L×W×H)	

POWER SUPPLY IP20 200W DALI 170-264VAC




SKU: W6011001-084 (12V), W6011001-085 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 16.7A	0 - 8.3A
	Rated power	200W	
INPUT	Voltage Range	170-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/220VAC (Full loading)	
Dimensions		287×49×29mm (L×W×H)	

POWER SUPPLY IP20 250W DALI 170-264VAC




SKU: W6011001-120 (12V), W6011001-115 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 20.8A	0 - 10.4A
	Rated power	250W	
INPUT	Voltage Range	170-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/220VAC (Full loading)	
Dimensions		287×49×29mm (L×W×H)	

POWER SUPPLY IP20 300W DALI 170-264VAC




SKU: W6011001-121 (12V), W6011001-116 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 25A	0 - 12.5A
	Rated power	300W	
INPUT	Voltage Range	170-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/220VAC (Full loading)	
Dimensions		287×49×29mm (L×W×H)	

POWER SUPPLY IP67 60W DALI 100-264VAC




SKU: W6011001-054 (12V), W6011001-044 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 5A	0 - 2.5A
	Rated power	60W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/220VAC (Full loading)	
Dimensions		211×51×30mm (L×W×H)	

POWER SUPPLY IP67 100W DALI 100-264VAC




SKU: W6011001-056 (12V), W6011001-045 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 8.3A	0 - 4.2A
	Rated power	100W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/220VAC (Full loading)	
Dimensions		257×51×30mm (L×W×H)	

POWER SUPPLY IP67 150W DALI 100-264VAC




SKU: W6011001-058 (12V), W6011001-046 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 12.5A	0 - 6.3A
	Rated power	150W	
INPUT	Voltage Range	100-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/220VAC (Full loading)	
Dimensions		305×51×30mm (L×W×H)	

POWER SUPPLY IP67 200W 12V DALI 170-264VAC




SKU: W6011001-057 (12V), W6011001-047 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 16.6A	0 - 8.3A
	Rated power	200W	
INPUT	Voltage Range	170-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/220VAC (Full loading)	
Dimensions		305×51×30mm (L×W×H)	

POWER SUPPLY IP67 300W 12V DALI 170-264VAC




SKU: W6011001-096 (12V), W6011001-086 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 20.8A	0 - 10.4A
	Rated power	300W	
INPUT	Voltage Range	170-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/220VAC (Full loading)	
Dimensions		305×51×30mm (L×W×H)	

POWER SUPPLY IP20 60W TRIAC & 0/1-10V DIMMABLE




SKU: W6011001-001 (12V), W6011001-002 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 5A	0 - 2.5A
	Rated power	60W	
INPUT	Voltage Range	0/1-10V: 100-264VAC, Triac: 170-264V	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/220VAC (Full loading)	
Dimensions		187×49×29mm (L×W×H)	

POWER SUPPLY IP20 100W TRIAC & 0/1-10V DIMMABLE




SKU: W6011001-003 (12V), W6011001-004 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 8.3 A	0-4.2A
	Rated power	100W	
INPUT	Voltage Range	0/1-10V: 100-264VAC, Triac: 170-264V	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/220VAC (Full loading)	
Dimensions		230×49×29mm (L×W×H)	

POWER SUPPLY IP20 150W TRIAC & 0/1-10V DIMMABLE




SKU: W6011001-005 (12V), W6011001-006 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 12.5A	0 - 6.25A
	Rated power	150W	
INPUT	Voltage Range	0/1-10V: 100-264VAC, Triac: 170-264V	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/220VAC (Full loading)	
Dimensions		287×49×29mm (L×W×H)	

POWER SUPPLY IP20 200W TRIAC & 0/1-10V DIMMABLE




SKU: W6011001-053 (12V), W6011001-043 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 16.7A	0 - 8.3A
	Rated power	200W	
INPUT	Voltage Range	170-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/220VAC (Full loading)	
Dimensions		287×49×29mm (L×W×H)	

POWER SUPPLY IP20 250W TRIAC & 0/1-10V DIMMABLE



SKU: W6011001-007 (12V), W6011001-008 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 20.8A	0 - 10.4A
	Rated power	250W	
INPUT	Voltage Range	170-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/230VAC (Full loading)	
Dimensions		287×49×29mm (L×W×H)	

POWER SUPPLY IP20 24V 300W TRIAC & 0/1-10V DIMMABLE




SKU: W6011001-119 (12V), W6011001-077 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 25A	0 - 12.5A
	Rated power	300W	
INPUT	Voltage Range	170-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/220VAC (Full loading)	
Dimensions		287×49×29mm (L×W×H)	

POWER SUPPLY IP67 60W TRIAC & 0/1-10V DIMMABLE




SKU: W6011001-101 (12V), W6011001-108 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 5A	0 - 2.5A
	Rated power	60W	
INPUT	Voltage Range	0/1-10V: 100-264VAC, Triac: 170-264V	
	Frequency Range	50 - 60Hz	
	Power Factor	PF≥0.5/230VAC (Full loading)	
Dimensions		211×51×30mm (L×W×H)	

POWER SUPPLY IP67 100W TRIAC & 0/1-10V DIMMABLE




SKU: W6011001-102 (12V), W6011001-103 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 8.3A	0 - 4.2A
	Rated power	100W	
INPUT	Voltage Range	0/1-10V: 100-264VAC, Triac: 170-264V	
	Frequency Range	50 - 60Hz	
	Power Factor	PF≥0.5/230VAC (Full loading)	
Dimensions		257×51×30mm (L×W×H)	

POWER SUPPLY IP67 150W TRIAC & 0/1-10V DIMMABLE



SKU: W6011001-104 (12V), W6011001-105 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 12.5A	0 - 6.3A
	Rated power	150W	
INPUT	Voltage Range	0/1-10V: 100-264VAC, Triac: 170-264V	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/230VAC (Full loading)	
Dimensions		305×51×30mm (L×W×H)	

POWER SUPPLY IP67 200W TRIAC & 0/1-10V DIMMABLE



SKU: W6011001-106 (12V), W6011001-107 (24V)



OUTPUT	DC Voltage	12V	24V
	Rated current	0 - 16.6A	0 - 8.3A
	Rated power	200W	
INPUT	Voltage Range	170-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.5/230VAC (Full loading)	
Dimensions		305×51×30mm (L×W×H)	





barislight.eu



b2b.barislight.eu



Έκθεση:
Ελ. Βενιζέλου και Βύρωνος,
26333 Πάτρα

Βιοτεχνία:
Γλαύκου 83, 26332 Πάτρα



2610 317 313
2610 317 300



info@barislight.eu



barislight.eu
b2b.barislight.eu



Baris Light