


LED COB STRIP TUNABLE 16W 10mm 2700-6500K IP20 24V



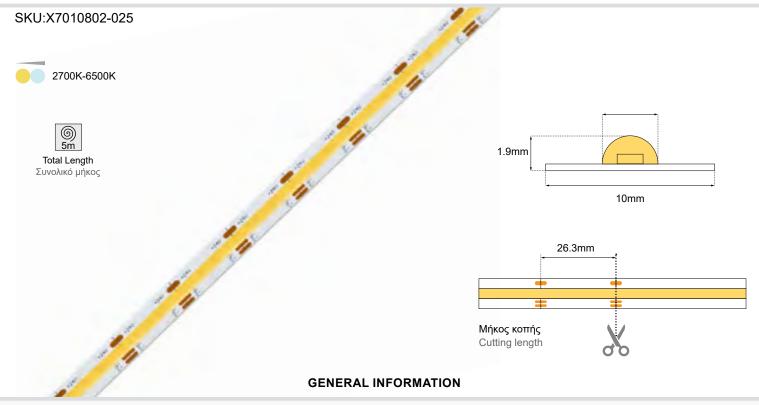

APPLICATION Indoor

IP RATING IP20

WARRANTY 5 years

ORIGIN China

DIMENSIONS

VISIBLE DIMENSIONS (W×H) 10 × 1.9mm

TOTAL LENGTH 5m/Roll

CUTTING LENGTH 26.3mm

ILLUMINANT

CHIP QTY	640chips/m
VOLTAGE	24VDC
POWER	8W+8W/m (Max)
PCB	Double Pcb (25/25)
ССТ	W: 2700K C: 6500K
CRI	Ra ≥90
LUMEN	≥85-100lm/W
WIRES	Double ended 3 color single wire, Length: 15cm
DIMMABLE	Yes



LED COB STRIP TUNABLE 16W 10mm 2700-6500K IP20 24V


FEATURES

- · Sanan chip.
- · 608 double CCT chips in linear arrangement, integrated package, uniform light color, no spot.
- · High thermal conductivity flexible circuit board design, which can be bent freely and is easy to install.
- · Chips directly mounted in PCB and beam angle up to 140D.
- · DC24V constant voltage design, safe and low voltage, small voltage drop, standard cascade of 5 meters
- · Genuine 3M glue, easy to install, firm and long-lasting

PRODUCT SIZE CHART(UNIT: mm)



INSTALLATION

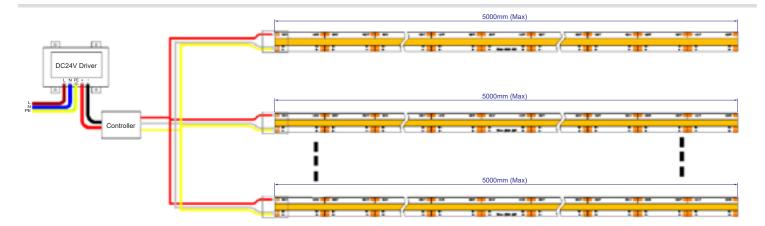

CAUTION

- During the installation process, sharp objects should not come in contact with the surface of the light strip to avoid damaging the colloid and causing defects.
- Avoid exposing the colloid in the light-emitting area to high-temperature objects to prevent scalding and maintain strip efficiency.
- Choose a DC 24V regulated power supply with appropriate power based on the length of the installed light strips. Ensure that the total power of each power supply driving the light strips does not exceed 90% of the rated power.
- Select a dual-color temperature controller with appropriate power for control based on the number of installed light strips.
 Ensure that the single-channel (single color) current and total current do not exceed 85% of the controller's nominal current.
- Pay attention to damp-proof and waterproof measures.
- · Don't tear repeatedly once the cob strips fixed.

 It is strictly prohibited to bend or twist the light strip over a short distance to avoid damaging the rubber strip or the internal electrical structure of the chip, as shown in the picture helpow



 When bending, ensure a length of less than 1CM, as shown in the picture below.

