



# MINUS R82 12W 36D 3000K RA90 WHITE BLACK 230V DALI



SKU: AH010104-012



Ø82.5mm

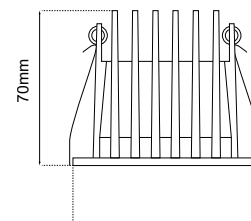

70mm

Ø82.5mm



Ø75mm


## GENERAL INFORMATION

APPLICATION	Indoor, recessed
DIRECTION OF MOUNTING	Ceiling
MATERIAL	Aluminium
COLOR	White body / Black chrome reflector
VISIBLE DIMENSIONS (Ø×L)	Ø82.5×70 mm
CUT-OUT DIMENSIONS (Ø)	Ø75 mm
IP RATING	IP20
LED	Bridgelux
WATTAGE	12W
VOLTAGE	230VAC
CCT	3000K
CRI	Ra >90
BEAM ANGLE	36D
LUMINOUS FLUX	960 lm
DIMMABLE	DALI
ORIGIN	PRC


## MINUS R82 12W 36D 3000K RA90 WHITE BLACK 230V DALI

### ΟΔΗΓΙΕΣ ΕΓΚΑΤΑΣΤΑΣΗΣ INSTALLATION INSTRUCTIONS


1.

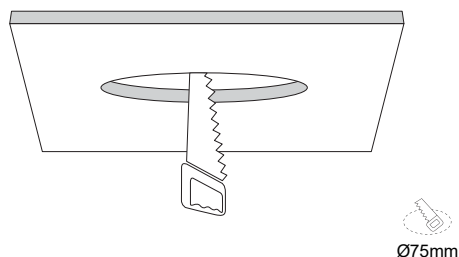

2.

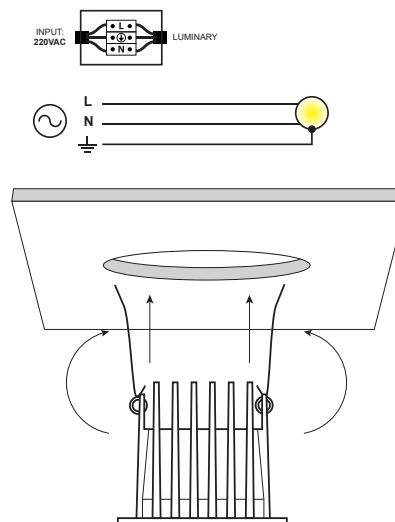

3.

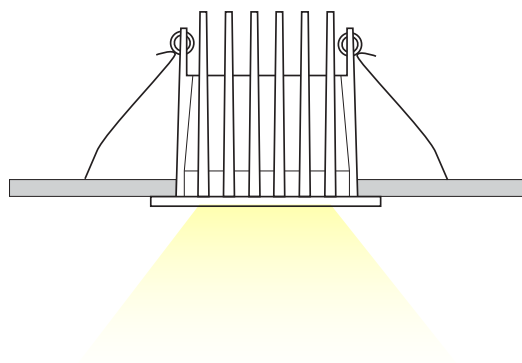

Τρυπήστε την οροφή σύμφωνα με τις αναγραφόμενες διαστάσεις κοπής.

Drill the roof according to the indicated cutting dimensions

Συνδέστε το καλώδιο του φωτιστικού με την ηλεκτρική παροχή.

Connect the cable of the luminaire with the electrical supply.

Κρατήστε τα ελατήρια προς τα πίσω για να περάσουν πρώτα αυτά από την οπή και έπειτα αφήνετε το φωτιστικό σιγά σιγά μέχρι να εφαρμόσει στην οροφή.

Hold the springs backwards to get them through the cutter first and then slowly leave the lamp until it applies into the roof.

Το φωτιστικό είναι έτοιμο για χρήση.

The luminaire is ready for use.