


Connector ZM-X60-G

Ref. 42332

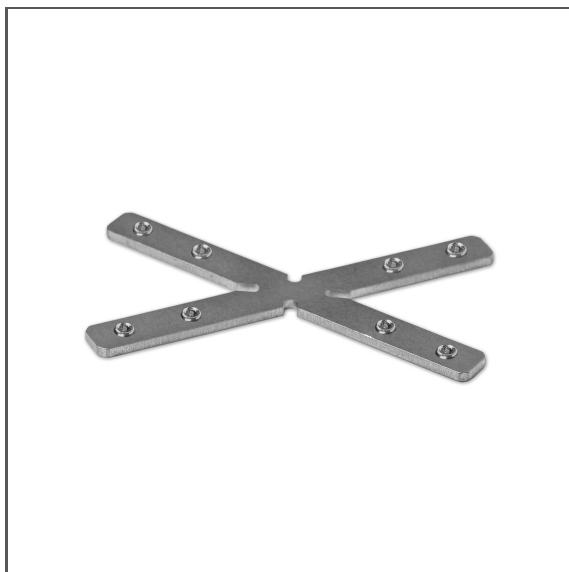

- Possibility to manually adjust the sections of the profile to be joined

APPLICATION

- crossing lighting fixtures at an angle of 60 degrees


MOUNTING

- to the profile, with a small lock and pressure screws (included)

TECHNICAL SPECIFICATIONS

Material	stainless steel	Color	■ silver
----------	-----------------	-------	----------

RELATED PROFILES > ARCHITECTURAL



3035-O
A08441
Ref. arch B8441



4050
A18050
Ref. arch 18050




4050-W
A18051
Ref. arch 18051



GIZA-DUO-LL
A02162
Ref. arch C2162



GIZA-LL
A00758
Ref. arch C0758



JAZ
A08547
Ref. arch B8547



OPAC-30
A06164
Ref. arch B6164



OPK-4
A00370
Ref. arch C0370

RELATED PROFILES > FOR MAIN LIGHTING



LARKO-50

A00756

Ref. arch C0756

RELATED PROFILES > MINIMALISTIC



PIKO-ZM

A01168

Ref. arch C1168

RELATED PROFILES > STRETCH CEILINGS



FOLED

A08332V1

Ref. arch B8332V1



FOLED-50

A03632

Ref. arch C3632



FOLED-50-BOK

A0A57945


Ref. arch SA57945



FOLED-50-SUF

A03631

Ref. arch C3631



FOLED-BOK

A08334V1

Ref. arch B8334V1



FOLED-SUF

A08333V1

Ref. arch B8333V1

RELATED PROFILES > UNIVERSAL

Connector ZM-X60-G

Ref. 42332



OLEK
A08505
Ref. arch B8505




PDS-ZM-PLUS
A02056
Ref. arch C2056



PDS-ZMG
A01418
Ref. arch C1418

RELATED SYSTEMS > GENERAL LIGHTING SYSTEMS



3035-KOZE
A08441+A18056
Ref. arch 18056+B8441



PK-4
A18044+A00370
Ref. arch 18044+C0370