


Profile KUBIK-45

Ref. A07697

Ref. arch B7697

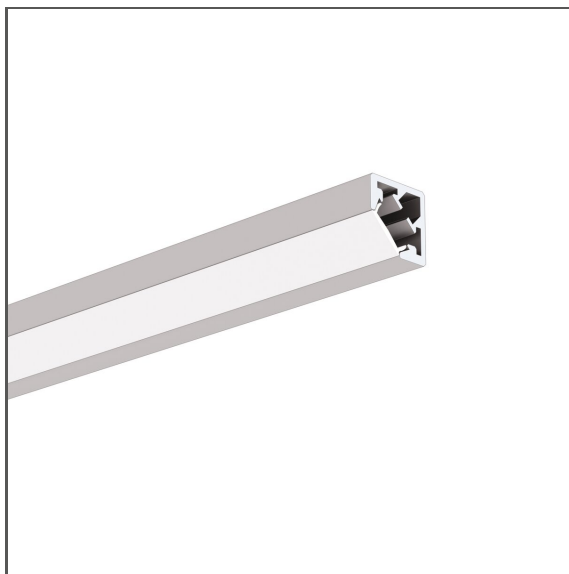

- For building spatial lighting forms
- Ease of creating geometric figures
- Lighting angle: 45 Degrees
- Smooth profile surfaces

APPLICATION

- decorative lighting


MOUNTING

- spatial forms made of profile sections, connected with ZM connectors
- cover cut together with the profile
- can be easily connected into runs and systems

ADDITIONAL INFORMATION

- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

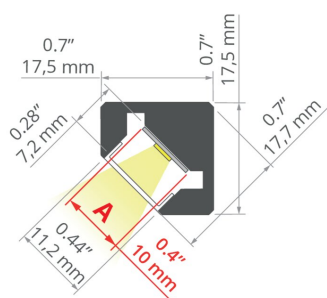

TECHNICAL SPECIFICATIONS

Material	aluminum
Color	■ silver anodized
Possible fixture IP	20
Possible fixture shapes	linear, polygonal
Profile cross-section	angled
Width	17.5 mm
Height	17.5 mm
LED gluing width A	10 mm
Number of LED strips A (8 mm wide)	1
Lighting at an angle	45
Possibility of obtaining a line of light	yes
Building type	Entertainment/ Arts, Retail, HoReCa object
Facility zone	shop windows and exhibition, lobby / foyer
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Wire out back of extrusion	yes

Length	Ref
1000 mm	A07697A_1 B7697ANODA_1
2005 mm	A07697A_2 B7697ANODA_2
3010 mm	A07697A_3 B7697ANODA_3

Profile KUBIK-45







Ref. A07697

Ref. arch B7697

SAMPLE PROJECTS



RELATED ACCESSORIES > RELATED COVERS


NAME	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
LIGER		PC	70 % <input type="checkbox"/> frosted	B17037M 17037
			32 % <input checked="" type="checkbox"/> black	B17037C 17040
KA		PC	63 % <input type="checkbox"/> frosted	B17035M 17035
			91 % <input checked="" type="checkbox"/> clear	B17035T 17036
KA-PRO		PC	67 % <input type="checkbox"/> frosted	B17064M 17064
			94 % <input checked="" type="checkbox"/> clear	B17064T 17065
HS		PC	73 % <input type="checkbox"/> frosted	B17208M 1369
			94 % <input checked="" type="checkbox"/> clear	B17208T 1370
KA-COM		PVC	70 % <input type="checkbox"/> frosted	B17179M 17179
			93 % <input checked="" type="checkbox"/> clear	B17179T 17180
PDS-LUK		PC	62 % <input type="checkbox"/> frosted	B17076M 17076

Profile KUBIK-45

Ref. A07697

Ref. arch B7697


RELATED ACCESSORIES > RELATED LED



K-1210-12V
K-1210-12
Ref. arch K-1210-12V



K-1275-12V
K-1275-12
Ref. arch K-1275-12V




WP-K-1220-12V
KWP-1220-12
Ref. arch WP-K-1220-12V



WP-K-1275-12V
KWP-1275-12
Ref. arch WP-K-1275-12V




WP-K-1220-IP65-12V
_błąd
Ref. arch WP-K-1220-IP65-12V

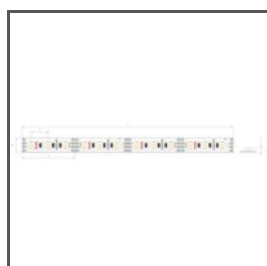


K-1275-RGB-12V
K-RGB-1275-12
Ref. arch K-1275-RGB-12V


RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

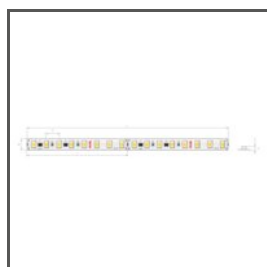


K-HE-0480-HD-24V
K-HEHD-0480-24
Ref. arch K-HE-0480-HD-24V



K-HE-0960-HD-24V
K-HEHD-0960-24
Ref. arch K-HE-0960-HD-24V



K-HE-1440-HD-24V
K-HEHD-1440-24
Ref. arch K-HE-1440-HD-24V

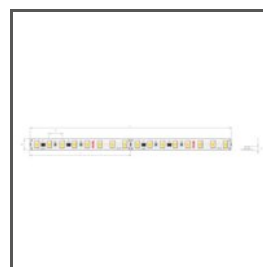


K-HE-1920-HD-24V
K-HEHD-1920-24
Ref. arch K-HE-1920-HD-24V


RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CTT



K-1530-RGB+W-24V
K-RGBW-1530-24
Ref. arch K-1530-RGB+W-24V

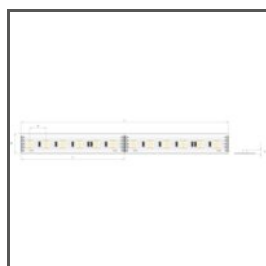

K-1920-120-RGB-24V
K-RGB-1920-120-24
Ref. arch K-1920-120-RGB-24V



WP-K-1920-120-RGB-24V
KWP-1920-120-RGB-24
Ref. arch WP-K-1920-120-RGB-24V

Profile KUBIK-45

Ref. A07697

Ref. arch B7697

RELATED ACCESSORIES > RELATED LED > WHITE MONO



WP-K-1640-HD-IP65-24V

KWP-GHD-1640-24

Ref. arch WP-K-1640-HD-IP65-24V



WP-K-1910-HD-IP65-24V

KWP-GHD-1910-24

Ref. arch WP-K-1910HDIP6524V



WP-K-1220-IP65-24V

KWP-1220-IP65-24

Ref. arch WP-K-1220-IP65-24V

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS



CONNECTOR

ZM-NA-120

C28242N00

Ref. arch 42729