


**Product Outline**



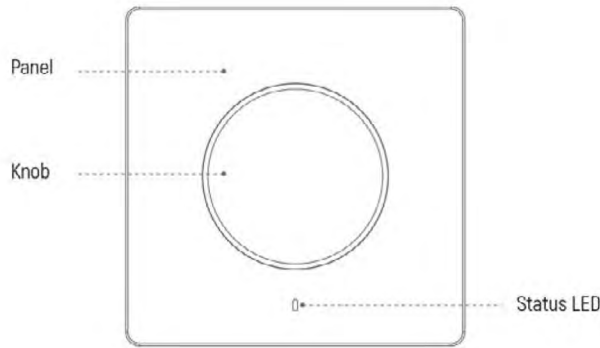


**Cod. / Κωδ. : F6080401-003**

**Technical Parameters**

Model	: DALI-CCT	Product No.	: 402000020201
Input Voltage	: 110-240V	Relative humidity	: 20-90%RH
Output Current	: 150mA	N.W.	: 132g
Output Signal	: DALI signal(Single address/Group/broadcast)	G.W.	: 182g
Working temp.	: -10°C~45°C	Dimension(mm)	: 86×86×57.5

**Dimension(mm)**



**Function Description**

**Turn on and turn off :**

Short press the knob to switch: in the off state, short press the knob to turn on the lamp. In the open state, short press the knob to turn off the lamp. The indicator light turns on briefly and then turns off.

**Power on level function:**

The color temperature/brightness command before power off is automatically sent to the DALI bus when the device is powered on again. The indicator light turns on briefly and then turns off.

**Turn the knob to change the brightness:**

Turn the knob clockwise to open the lamp slowly from the minimum brightness and gradually increase; turn the knob counterclockwise to reduce the brightness gradually until the lamp is in the lowest brightness. [The indicator light turns on briefly and then turns off].

**Keep press and turn the knob to change the color temperature:**

Keep press and turn the knob clockwise to make the color temperature become warmer and gradually increase until the lamp is in the warmest color temperature. Keep press and turn the knob counterclockwise to make the brightness become colder gradually until the lamp is in the coldest color temperature. [The color temperature will be changed significantly, after 3 laps. The indicator light turns on briefly and then turns off]

**Dial code function:**

When S1 dials to 0-3, the device can control a single address, which can control up to 0-63 addresses. Such as:

