

**Features :**


- 170~264VAC input
- Protection: Short circuit/overload/over voltage/over temperature
- Miniature size and 1U low profile
- Working temperature with 60°C
- Cooling by free air convection
- 100% full load burn-in test
- IP67 waterproof
- 3years warranty

Specification


CE RoHS BIS SELV IP67

	Model	HRLW-300-12	HRLW-300-24
Output	DC Voltage	12V	24V
	Voltage Tolerance	±0.5V	
	Rated Current	0 - 25A	0 - 12.5A
	Rated Power	300W	300W
	Ripple & Noise	250mVp-p	250mVp-p
Input	Voltage Range	170-264VAC	
	Frequency Range	50 - 60HZ	
	Power Factor	PF≥0.6/220VAC (Full loading)	
	Full Load Efficiency(Typ.)	83.8%	89%
	AC Current (Max.)	2.59A/230VAC	2.44A/230VAC
	Leakage Current	<0.75mA/260VAC	
	Inrush Current	≤ 60A	
Protection	Short Circuit	Protection type: Hiccup mode, recovers automatically after fault condition is removed.	
	Over Load	Hiccup mode, recovers automatically after fault condition is removed	
	VIBRATION	10-500Hz 2G10min	
	BURNT-IN TEST	Input voltage: 220V 50Hz rated output current 25°C Bum-in 2h	
Environment	Over Temperature	100°C±10°C shut down o/p voltage, re-power on to recover	
	Working TEMP.	-20 ~ + 50 °C	
	Working Humidity	20~60%RH,non-condensing	
	Storage TEM.,Humidity	-20~+ 85%, 10~95%RH	
	START RISE HOLD TIME	500ms, 20ms, 50ms/230VAC at full load	
Safety & EMC	Vibration	10 ~500Hz, 5G 12min./1 cycle, period for 60min.each along X,Y,Z axes.	
	Safety Standards	CE Mark	
	Withstand Voltage	I/P-O/P:1.5KVAC I/P-GND:1.5KVAC	
	EMC Immunity	EN55015:2013;EN61547:2009; EN61000-3-2:2014; EN61000-3-3:2013	
Others	Weight	1.0kg	
	Dimension	315x62x30mm(LxWxH)	
	Packing	20pcs/CTN	
Notes	<ol style="list-style-type: none"> 1. All parameters NOT specially mentioned are measured at 230VAC input , rated load and 25°C of ambient temperature. 2. Tolerance: includes set up tolerance, line regulation and load regulation . 3. The power supply is considered as a component that will be operated in combination with final Equipment. Since EMC performance will be affected by the complete installation, the final equipment manufactures must be-qualifyEMC Directive on the complete installation again. 		

Mechanical Specification

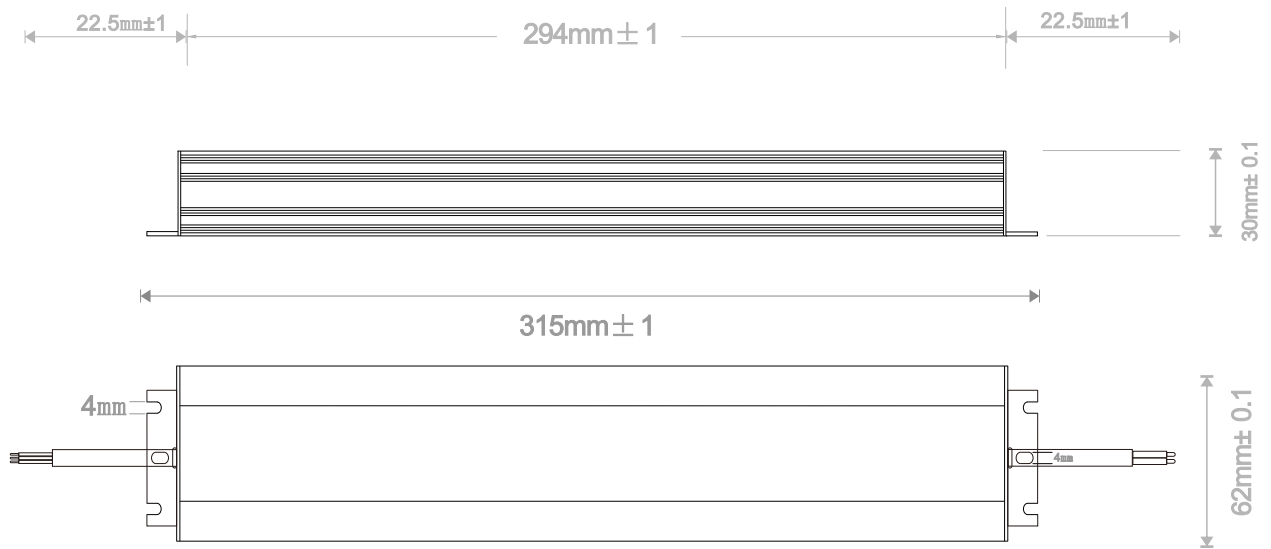

Derating Curve

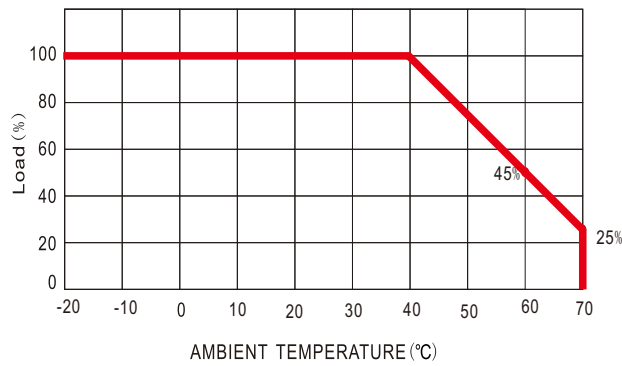

Package

DIMENSION	315x62x30mm(LxWxH)
CARTON QUANTITY	20PCS/Carton
CARTON SIZE	42.7x35x17.3(CM)
WEIGHT	1000g/PCS